
# 智能智造 数字拳箍

Intelligent manufacturing, Digital breeding



Animal husbandry equipment



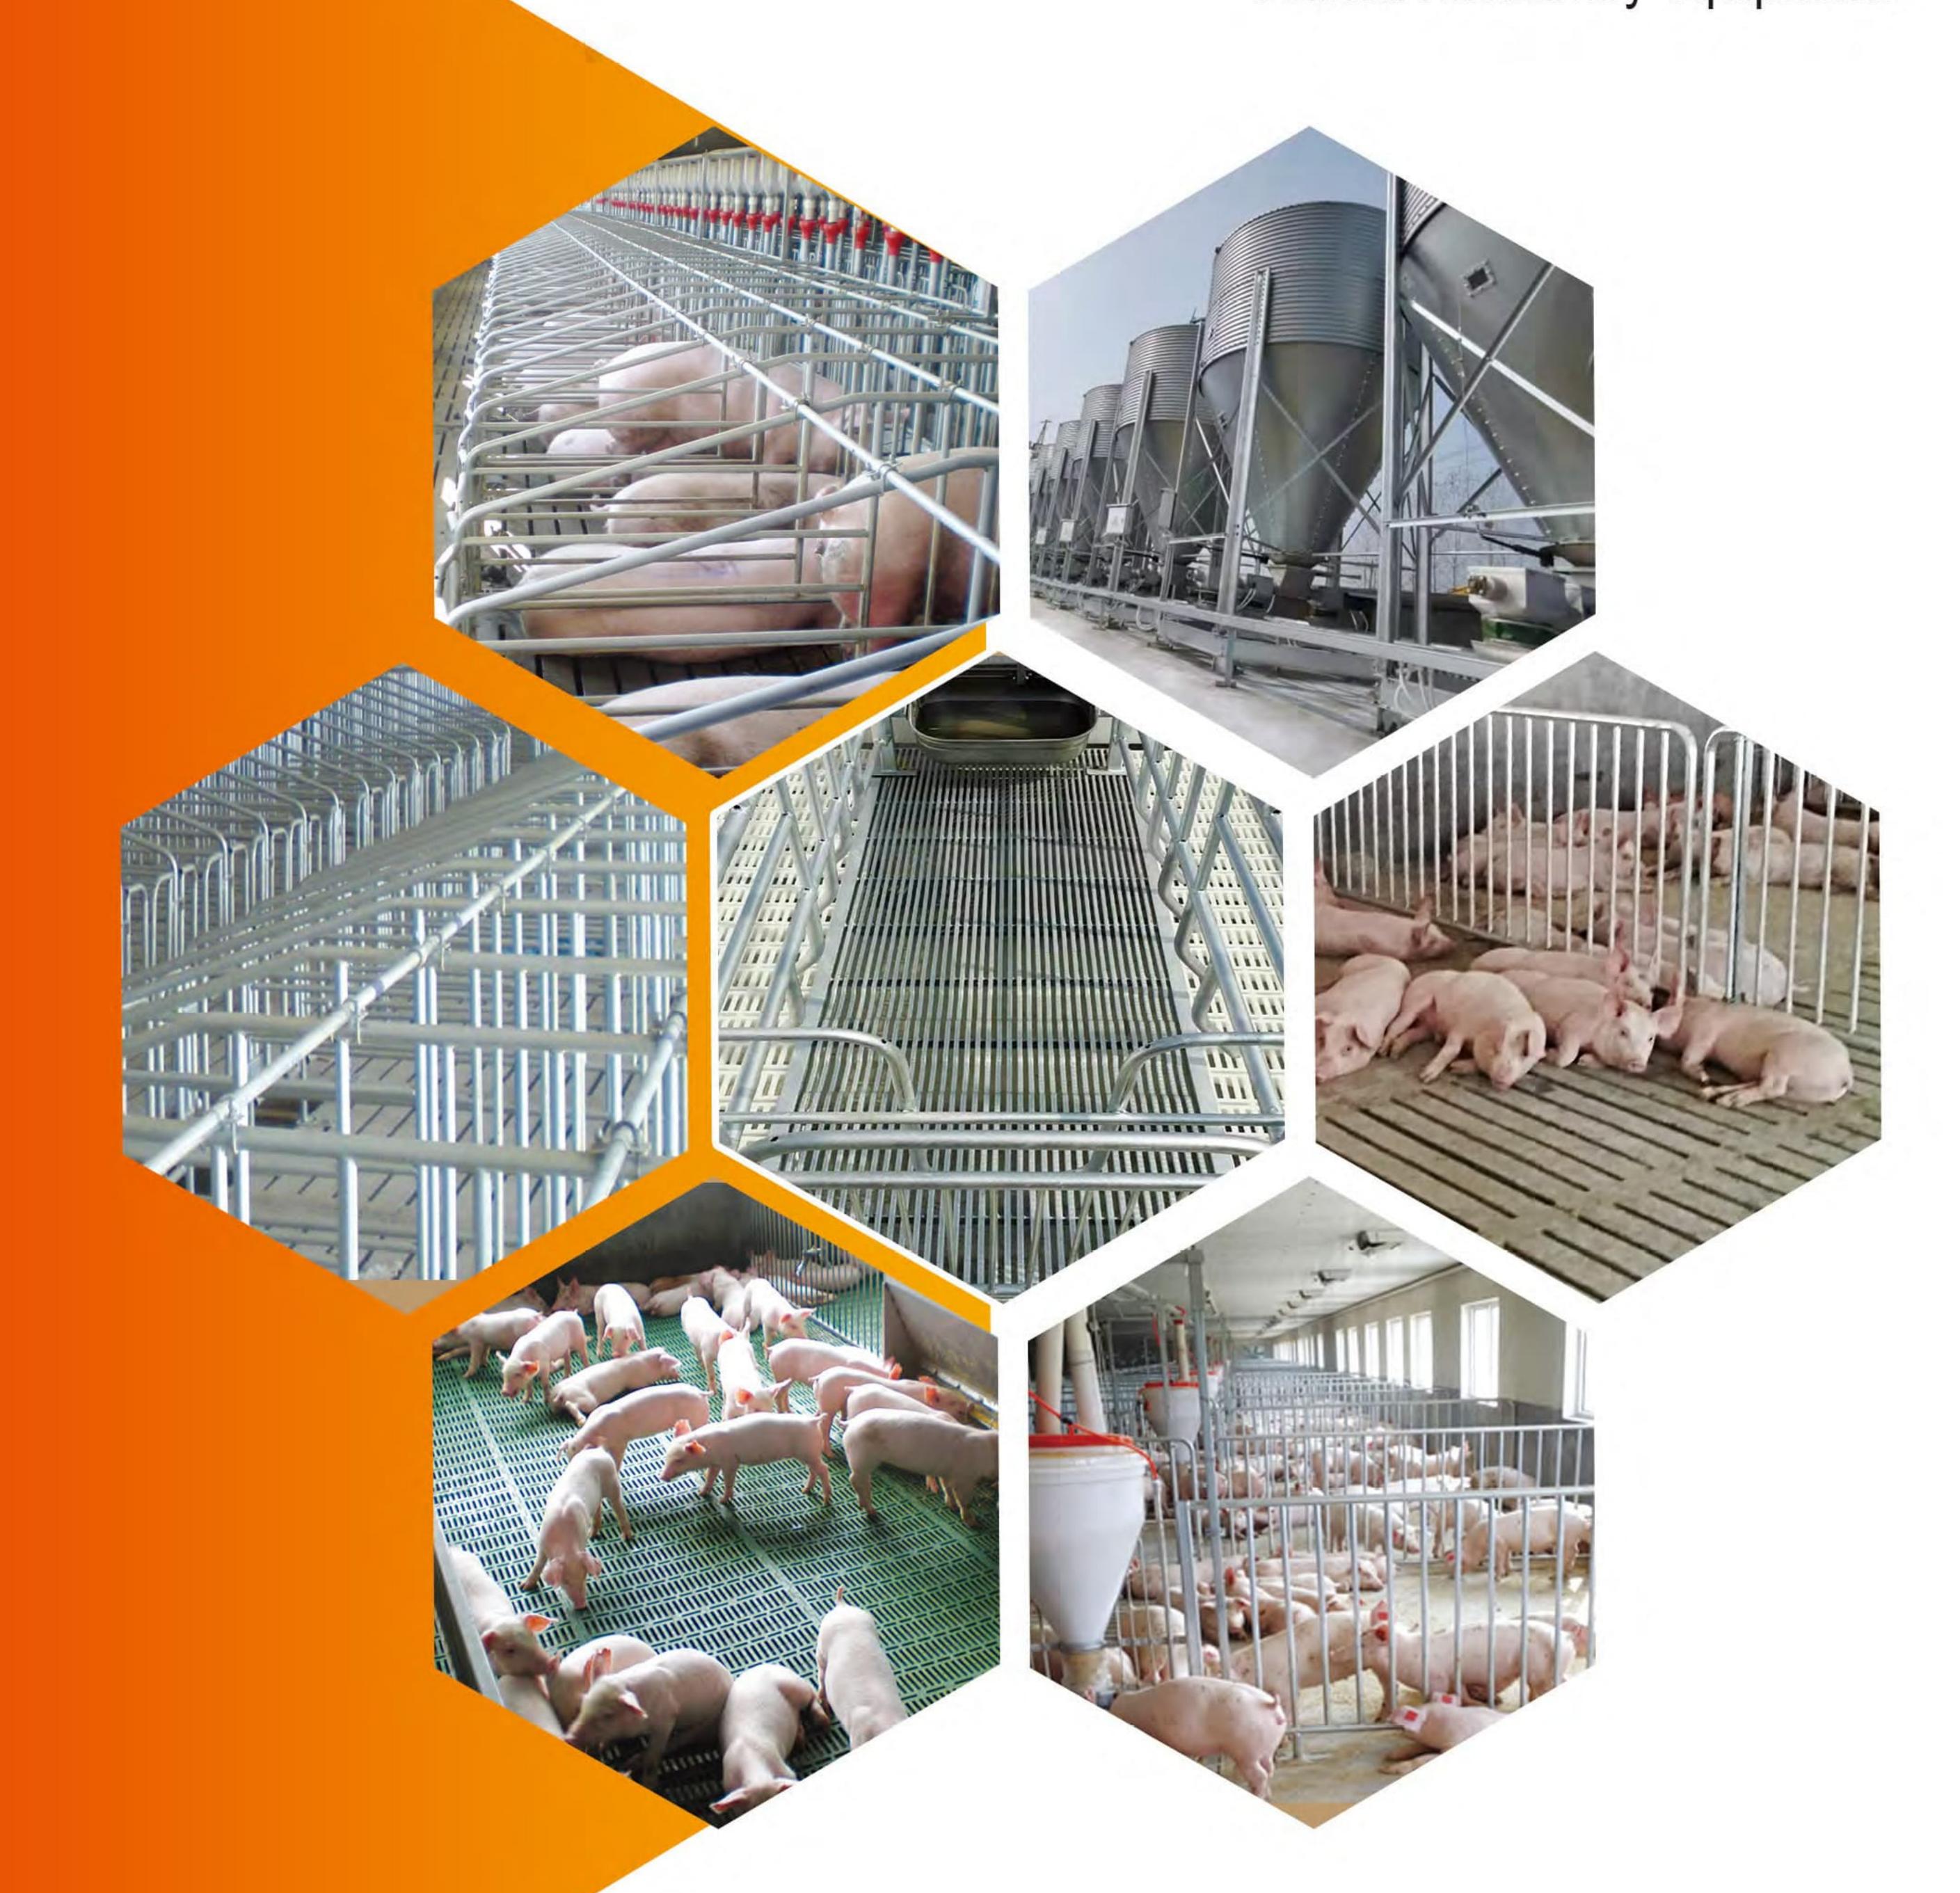

销售热线电话 Sales Hotline: 0539-7202222

邮箱 E-mail: duyanping@madeinlk.com中文网址Website: www.madeinlk.com地址:山东省临沂市兰山区金锣科技园

Add: Jinluo science and technology park, Lanshan district, Linyi city,

Shandong province of China.



## CONTENTS

### 目录

企业简介 Company file

料塔

Feed Tower

UJ page 06

**N**5

饮水碗 Drinking water bowl

方形饮水碗 圆形饮水碗

Square drinking water bowl Round drinking water bowl

06 page 07-27

料线

Feed line

料塔接料箱 驱动装置 塞链

转接料斗装置 转角轮

下料系统零部件 管接

智能料槽

塞盘料线

绞龙料线 Tower receiving box Drive device Plug chain

Transfer hopper device Corner wheel Feeding system Pipe connection Intelligent feed trough Plug plate feeding line screw feeding line

page 02-04

栏位

Fence

半限位栏

全限位栏

保育围栏

育肥围栏

Half limit Fence

Full limit fence

Obstetric bed

Conservation fence

Fattening fence

04 page 05

母猪食槽

Sow trough

page 28

其它产品

Other products display

干湿料槽 仔猪运输车 透明变径口

骑马卡 提升绞龙

南非绞龙 PVC料管 料线支架

镀锌料线管

Dry&wet feed trough Piglet carrier Transparent diameter changing mouth Riding clip Lifting screw feed conveyor South Africa screw PVC feed tube Feed line bracket

Galvanized feed line tube

## COMPANYFILE

### 公司简介

临沂连科智能制造股份有限公司成立于2010年, 注册资本1000万元。生产车间位于山东省临沂市 兰山区金锣科技园,占地60000多平方米,公司下 设畜牧设备、自动化设备、机加工设备和注塑设 备四个事业部,具有自动化设备、畜牧设备和机加 工、注塑产品的自主开发和加工制造能力。


畜牧设备事业部具备新建养殖场的总体设计、设 备造型、设备制造、设备安装和人员培训等资质 和能力,特别是自主研发了 "猪e管数字化养殖系 统"运用互联网和物联网技术、突破传统养殖模 式,实现了生猪养殖的自动化和数数字化管理。

勤劳聪慧的连科人肩负〃以科学为导向,以技术 为手段,为客户创造最大价值 "的使命,遵循"科 技创造品质,诚信造就品牌"的经营理念,本着" 第一时间,第一速度,用心服务,行无止境"的 服务宗旨,为客户提供面对面、心贴心的服务。

Linyi Lianke Intelligent Manufacturing Co., Ltd was established in 2010 with a registered capital of 10 million yuan. The production plant is located in Jinluo Science and Technology Park, Lanshan District, Linyi city, Shandong Province, covering an area of more than 60000 Square meters. The company has four business divisions of animal husbandry equipment, food automation equipment, mechanical parts processing and injection molding processing, with independent development and processing and manufacturing capabilities of food automatic equipment, animal husbandry equipment, mechanical parts processing and injection molding products.


Animal husbandry equipment division has qualification and ability for new stype farms of the overall design, equipment shaping, equipment manufacturing, equipment installation and personnel training, especially the independent research and development of "digital e tube breeding system" of using the Internet technology, break through traditional breeding model, automate the pig breeding & farming and digital management.

Intelligent and hardworking Lianke persons still follow policy "Take science as the guide, take technology as the ways, create maximum value for customers" as the mission, adhere to "science and technology create quality, integrity create brand" business philosophy, in line with "the first time, the first speed, service attentively, endless service tenet" provide face to face, attensive service to our customers.

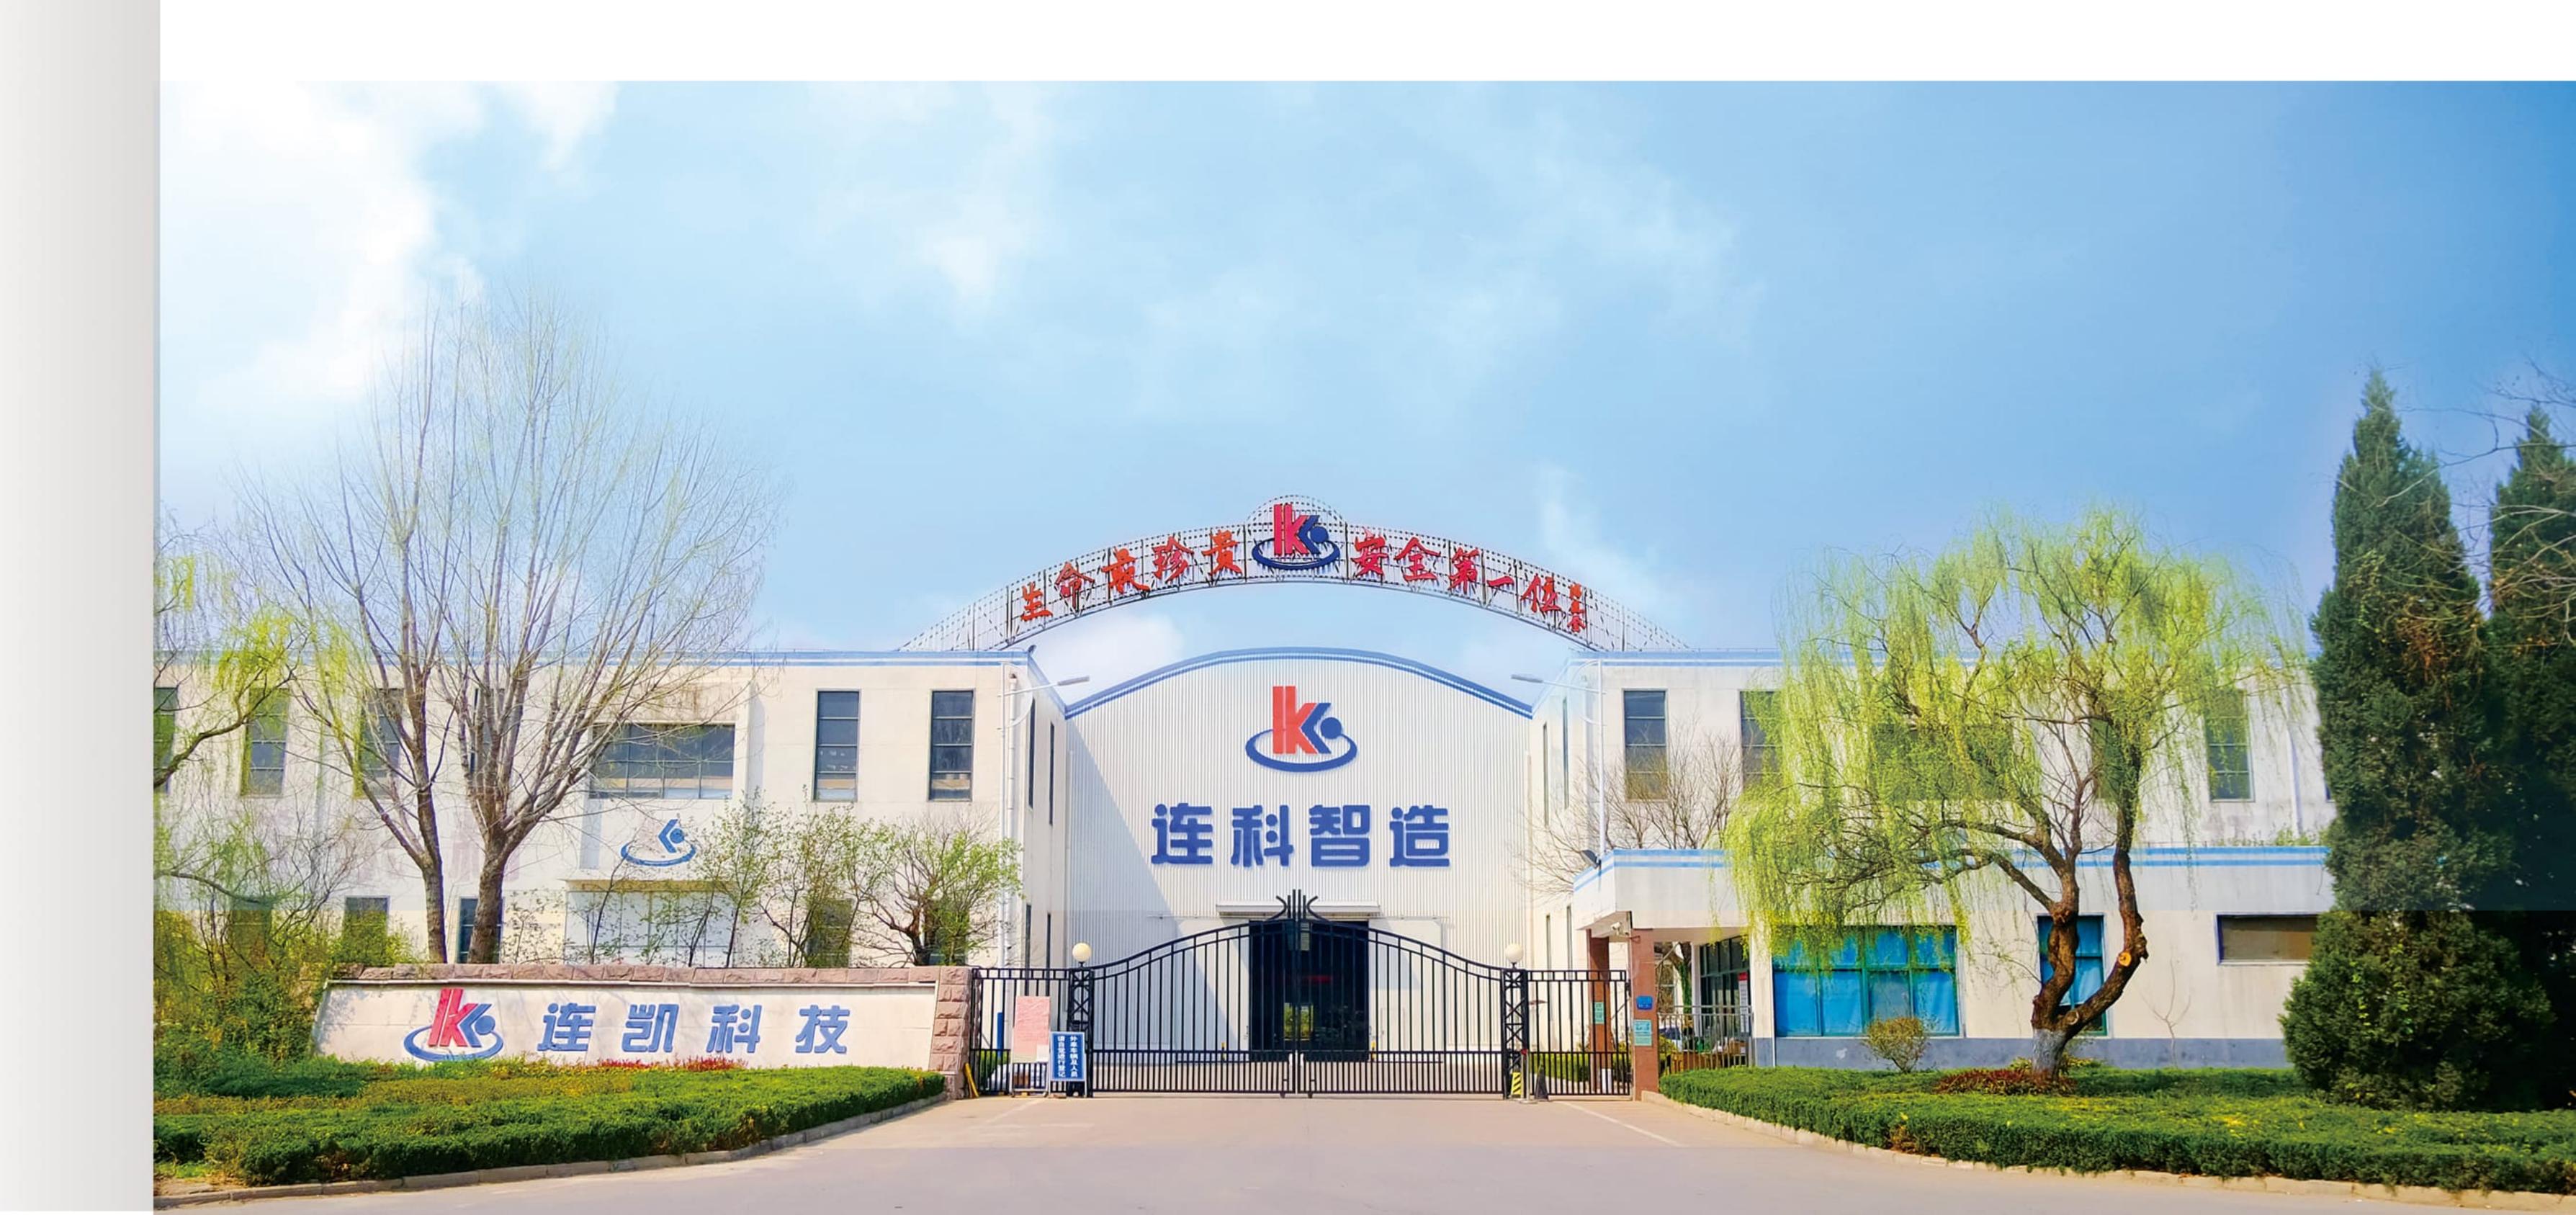

# Feed Tower #14 15



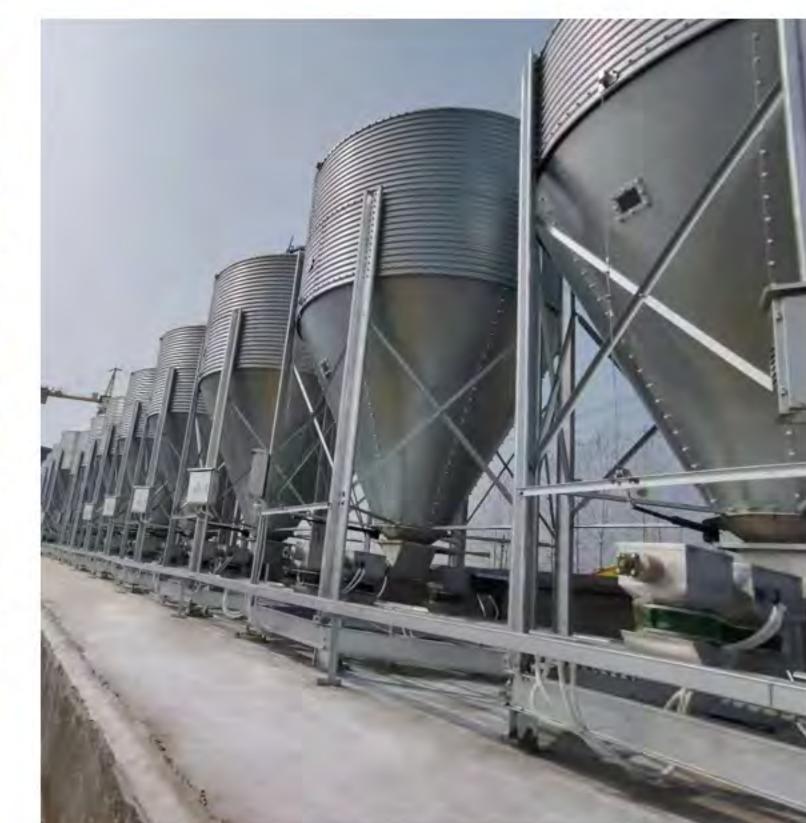




选材为双面镀锌波纹板,镀锌量275g/㎡,锌层厚度大于19μm,由上中下三层围板组装而成,料塔组装采用M10\*20高强度镀锌螺栓,除上下出口外,还配备应急打料口、观察口、透气孔(配有滤芯)、爬梯、承重框(采用H型钢HN175\*90和HN200\*100)、称重模块、自动开盖装置、阻旋料位计等,具体大小可根据客户需求定制。

Material for double-sided galvanized corrugated plate, galvanized 275g/m², zinc layer thickness is more than 19µm, from the upper, middle and lower three layers of sealing plate assembly, tower assembly using M10\*20 high strength galvanized bolt, in addition to the upper and lower outlet, It is also equipped with emergency feeding port, observation port, air vent (with filter element), climbing ladder, load-bearing frame (using H-shaped steel HN175\*90 and HN200\*100), weighing module, automatic cover opening device, resistance and rotation material level meter, etc. The specific size can be customized according to customer requirements.

型号 Model	吨位 Weight	直径 Diameter	高度 Height	支腿数 Leg quantity
LKXM-A1-1	4T	2200mm	4460mm	4
LKXM-A1-2	6T	2750mm	4705mm	6
LKXM-A1-3	8T	2750mm	5265mm	6
LKXM-A1-4	10T	3750mm	5716mm	6
LKXM-A1-5	12T	3667mm	5379mm	6
LKXM-A1-6	15T	3667mm	5972mm	6
LKXM-A1-7	17T	3667mm	6232mm	6
LKXM-A1-8	20T	3750mm	6793mm	8

			1	
型号 Model	吨位 Weight	直径 Diameter	高度 Height	支腿数 Leg quantity
LKXM-A2-1	3T	1800mm	4300mm	4
LKXM-A2-2	5T	1800mm	5880mm	4
LKXM-A2-3	7T	2750mm	4720mm	6
LKXM-A2-4	10T	2750mm	5600mm	6
LKXM-A2-5	15T	3600mm	5700mm	6
LKXM-A2-6	20T	3600mm	6600mm	8
LKXM-A2-7	25T	3600mm	7800mm	8



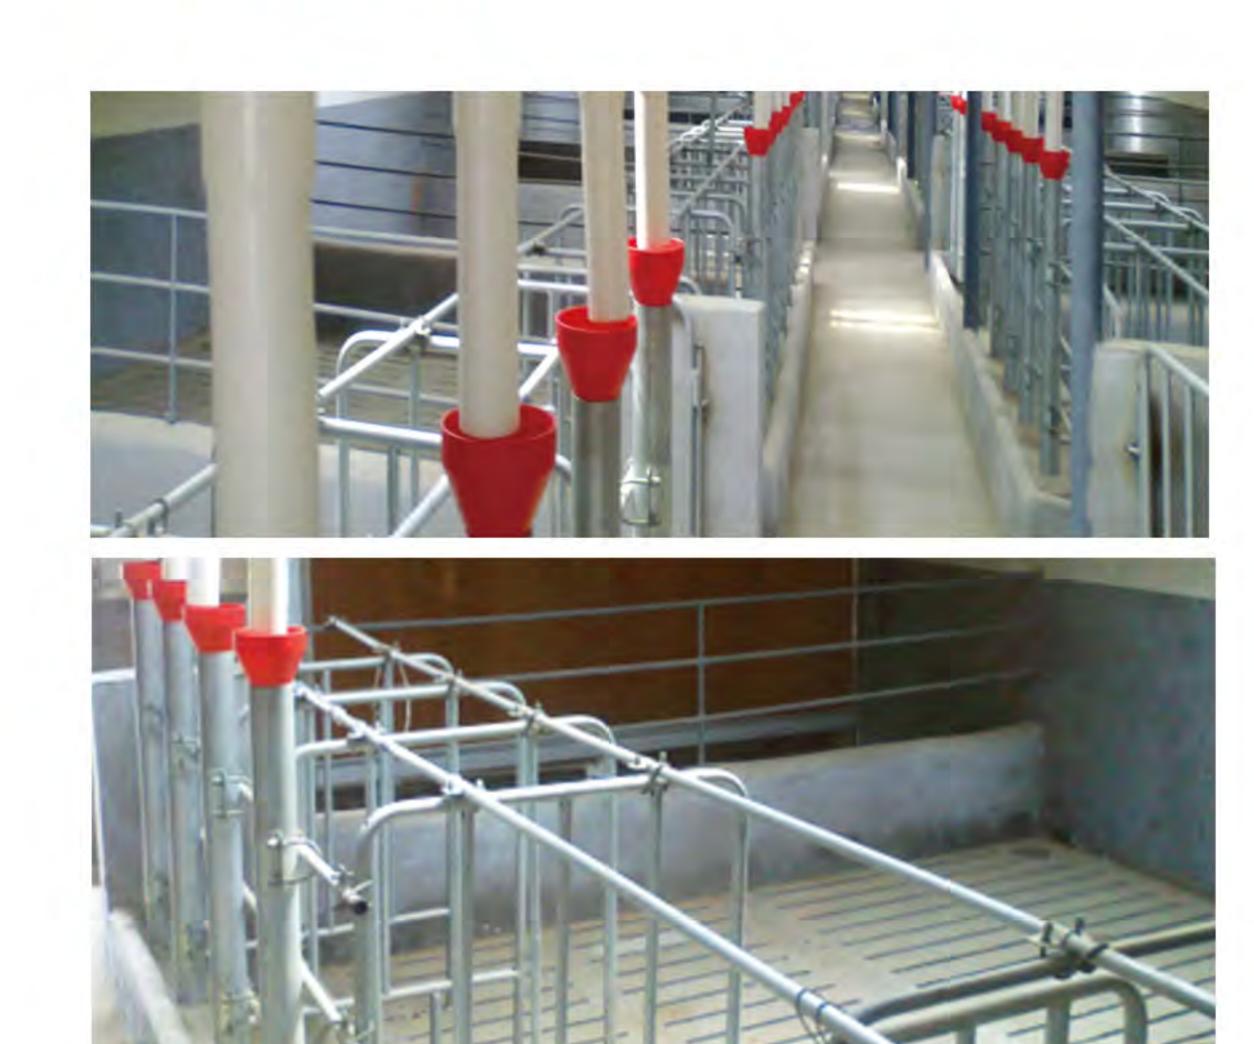

### 半限位栏 Half limit Fence

规格: 0.7mx0.5mx1.0m 0.9mx0.55mx1.0m

1.0mx0.6mx1.0m

优点: 母猪有活动空间,增加肢体健康度;

适用范围:空怀母猪、妊娠后期母猪、适龄待配后备。

栏体使用8分管和6分管焊接,焊缝打磨光滑避免伤猪,整体热 渗锌处理,干净卫生,使用寿命长,通过双U型螺栓固定,组装

简便牢固,可根据客户需求定制。

**Specifications**: 0.7mx0.5mx1.0m 0.9mx0.55mx1.0m 1.0mx0.6mx1.0m **Advantages**: sows have space to move, increase body health;

**Scope of application**: pregnant sows, late gestation sows, age to be reserved.

The pigsty body is welded by 8 and 6 in charge, the weld is polished smooth to avoid pig injury, the overall hot zinc treatment, clean and hygienic, and the service life is long. Fixed by double U-bolts, the assembly is simple and firm, and can be customized according to customer needs.







## 全限位栏 Full limit fence

规格: 2.3mx0.65mx1.1m、2.2mx0.63mx1.1m、2.1mx0.6mx1.0m

优点: 同步饲喂,减少应激,精准饲喂; 膘情可控; 易察情;

适用范围: 授精、怀孕前期母猪。

配备一体通槽、高级碰锁,栏体使用4分管和6分管焊接,焊缝 打磨光滑避免伤猪,整体热渗锌处理,干净卫生,使用寿命长, 通过双U型螺栓固定,组装简便牢固,可根据客户需求定制。

**Specification**: 2.3mx0.65mx1.1m 2.2mx0.63mx1.1m 2.1mx0.6mx1.0m **Advantages**: synchronous feeding, reduce stress, accurate feeding;

The condition is controllable; easy for observation;

Scope of application: insemination, pregnant sows.

Equipped with a whole trough, advanced lock, column body using 4 and 6 in charge of welding, weld smooth to avoid pig injury, the overall hot zinc treatment, clean and hygienic, long service life, through the double U-bolt fixed, simple and firm assembly, can be customized according to customer needs.









### 产床 Obstetric bed

规格: 2.2-2.4mx1.8mx1.2/0.5m、2.7mx1.8-1.85mx1.2/0.5m 特点:

1、围栏材质:全栅栏式;母猪栏架栅栏+仔猪PVC围板; 2、围栏防腐:焊管刷漆;镀锌管焊接,整体热镀锌;

3、护仔箱: 开放式; 保温箱; 长方形护仔箱;

4、小环境:地暖+烤灯;电热毯+烤灯;

5、母猪食槽:配备不同型号不锈钢食槽。

6、仔猪饮水玩和补料槽。

### 可根据客户需求定制。


**Specification**: 2.2-2.4mx1.8 mx1.2/0.5 m 2.7 mx1.8 1.85 mx1.2/0.5 m

#### Features:

- fence material: full fence type; Sow frame fence + PIGlet PVC coaming board;
- 2, fence anticorrosion: welding pipe brush paint; Galv anized pipe welding, whole hot dip galvanized;
- 3, baby box: open; Incubator; Rectangular baby box;
- 4, small environment: floor heating + baking lamp; Electric blanket + baking lamp;
- 5, female pig trough: equipped with different models of stainless steel trough.
- 6, piglet drinking water to play and feed trough;
  Can be customized according to customer requirements.





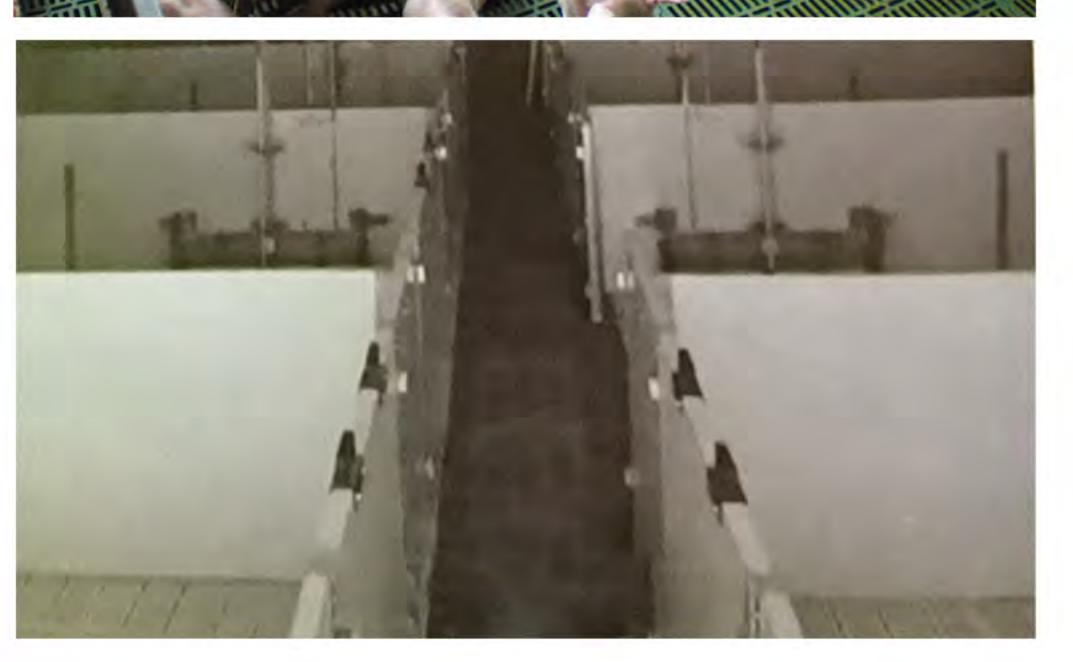



### 保育围栏 Conservation fence

规格: 4mx2mx0.7m、3.8mx2mx0.7m、3mx2.6mx0.7m 特点:

1、材质: 栅栏式; 围板式; 2、防腐: 防A锈漆; 整体热渗锌;

3、地面:实心地面;半漏粪;全漏粪、发酵床;

4、料槽:双面不锈钢;双面铸铁底+镀锌板;料仓:圆盘式水泥料仓;圆盘式铸铁底+镀锌板圆筒料槽;干湿料槽(不锈钢料槽底+塑料桶)。

### 可根据客户需求定制。


Specifications: 4MX2MX0.7m 3.8MX2MX0.7m 3Mx2.6Mx0.7m Features:


- 1, material: fence type; Round plate;
- 2, anti-corrosion: anti-rust paint; Integral hot galvanizing;
- 3. Ground: solid ground; Half leakage dung; Full manure leakage, fermentation bed;
- 4, trough: double-sided stainless steel; Double-sided cast iron bottom + galva nized sheet bin; Circular cement trough bottom + galvanized sheet cylinder bin; Circular cast iron bottom + galvanized sheet cylinder groove; Dry and wet tank (stainless steel tank bottom + plastic bucket).

Can be customized according to customer requirements.





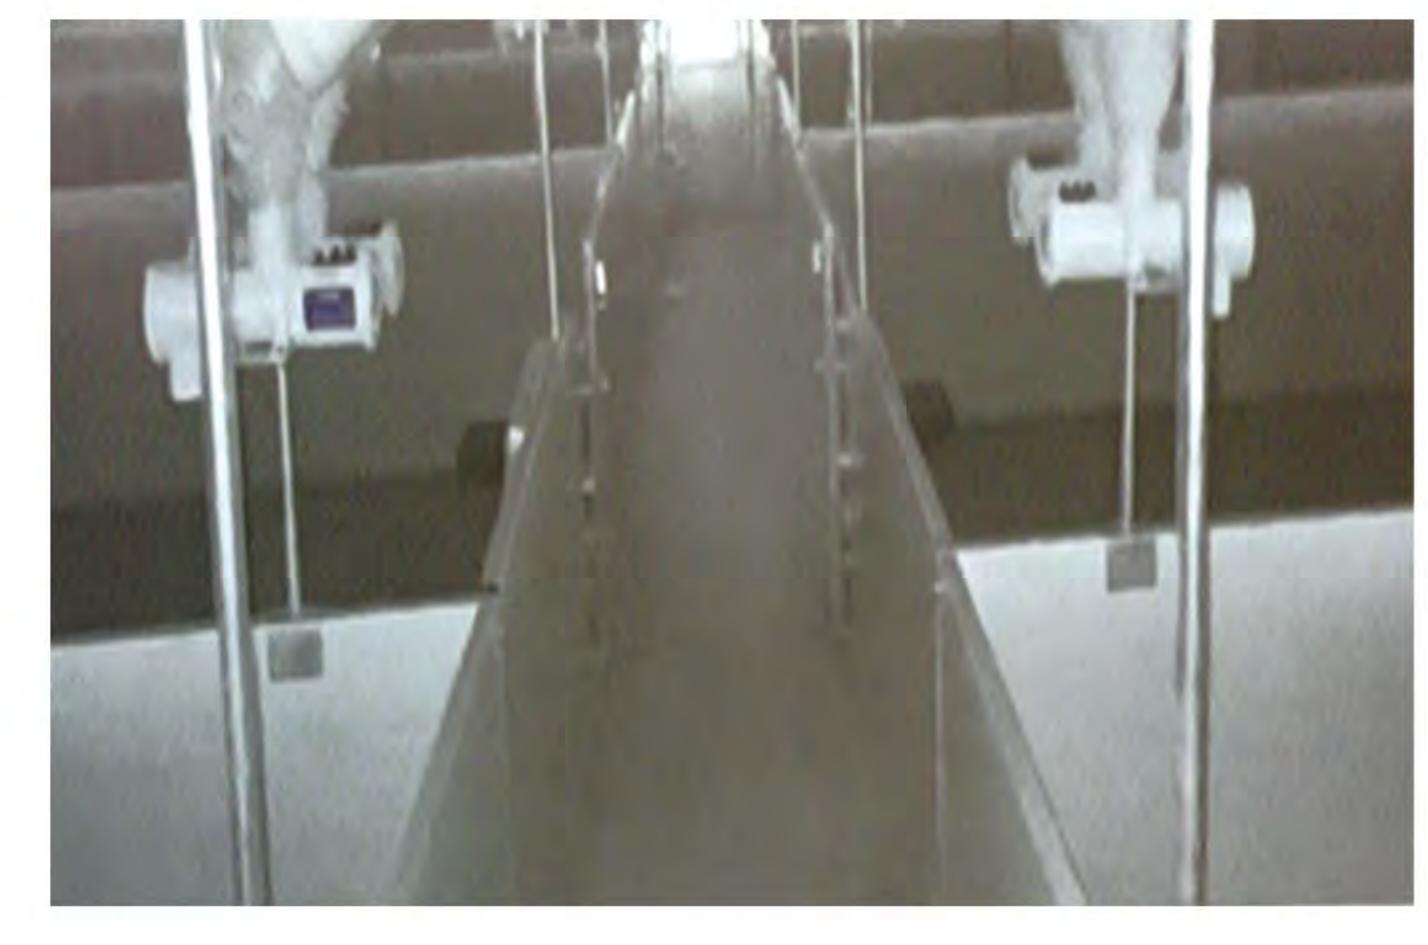

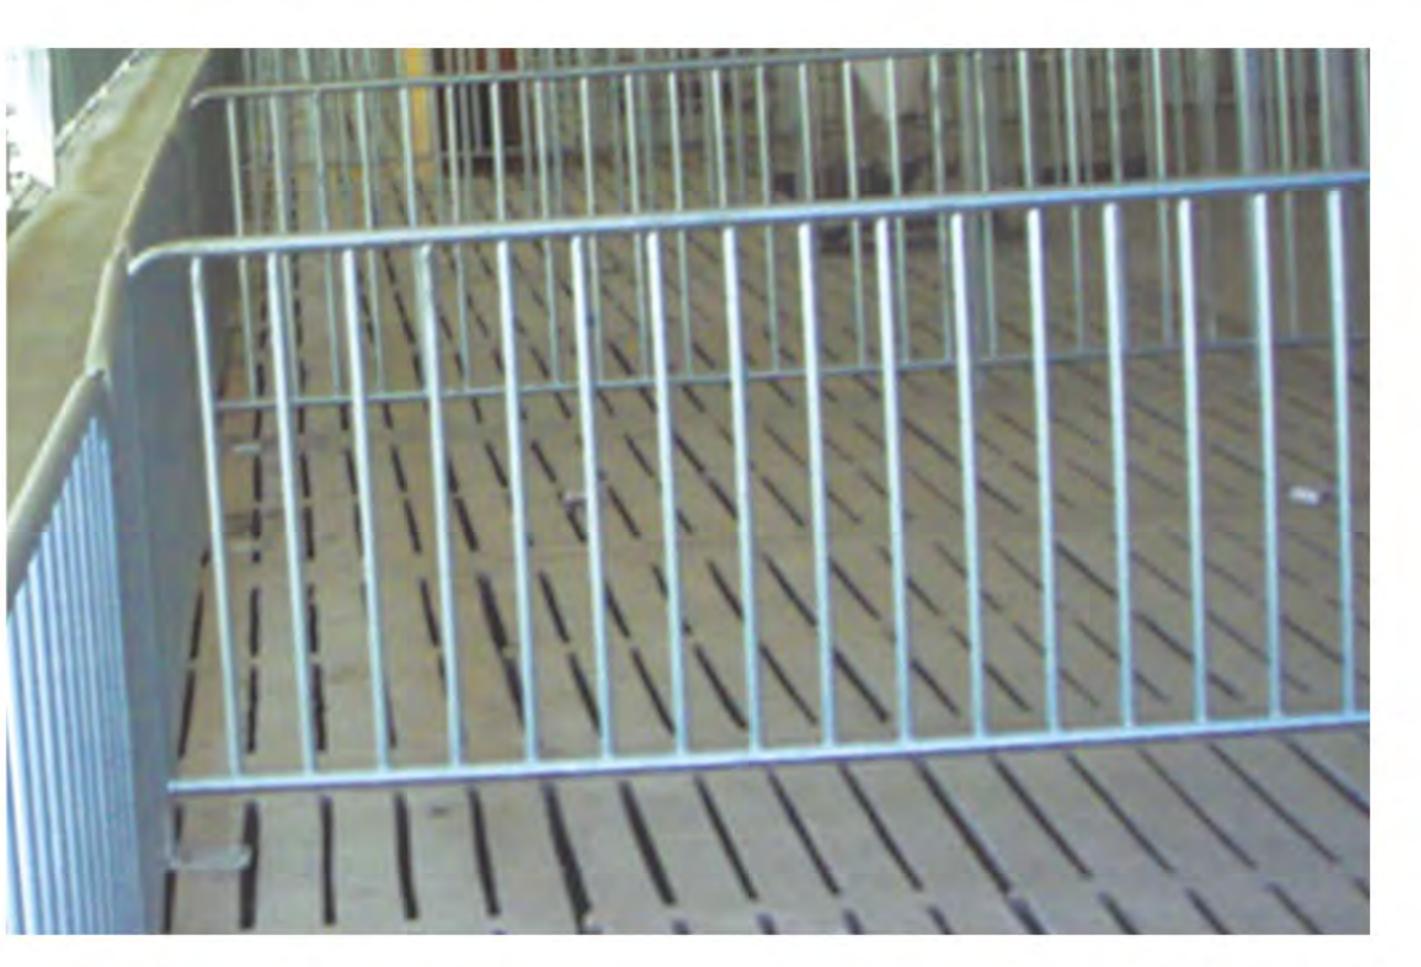



### 育肥围栏 Fattening fence

规格: 6mx3mx1m 5.5mx3.4mx1m 4mx3mx1m 特点:

1、材质: 栅栏式; 围板式;

2、防腐: 防锈漆; 整体热渗锌;

3、地面:实心地面;半漏粪;全漏粪;

4、料槽:双面不锈钢;双面铸铁底+镀锌板料仓; 圆盘式水泥槽底+镀锌板圆筒

料仓:圆盘式铸铁底+镀锌板圆筒料槽;干湿料

槽(不锈钢料槽底+塑料桶)。

可根据客户需求定制。

Specification: 6Mx3MX1m 5.5Mx3.4Mx1m 4Mx3MX1m Features:

- 1, material: fence type; Round plate;
- 2, anti-corrosion: anti-rust paint; Integral hot galvanizing;
- 3. Ground: solid ground; Half leakage dung; All the leakage dung;
- 4, trough: double-sided stainless steel; Double-sided cast iron bottom + galvanized sheet bin; Circular cement trough bottom + galvanized sheet cylinder bin; Circular cast iron bottom + galvanized sheet cylinder groove; Dry and wet tank (stainless steel tank bottom + plastic bucket).

Can be customized according to customer requirements.

## Sow trough 母程實譜









采用304不锈钢一体冲压成型,卷边加强,牢固耐用不伤猪,底部圆弧形设计,易采食,不存料,固定方式灵活; 大小尺寸和固定方式可根据客户需求定制。

304 stainless steel body stamping molding, crimping strengthening, firm and durable does not hurt the pig, the bottom of the circular arc design, easy to eat, no storage, fixed flexible; The size and fixed mode can be customized according to customer requirements.

型号 Model	名称 Name	长度 Length	宽度 Width	高度 Heighth	材质 Material	厚度 Thickness
LKXM-SC-1	母猪食槽 Sow trough	415mm	355mm	230mm	304不锈钢 304 stainless steel	1.12-1.42mm
LKXM-SC-2	母猪食槽 Sow trough	420mm	350mm	230mm	304不锈钢 304 stainless steel	1.12-1.42mm
LKXM-SC-3	母猪食槽 Sow trough	450mm	360mm	230mm	304不锈钢 304 stainless steel	1.12-1.42mm
LKXM-SC-4	母猪食槽 Sow trough	480mm	400mm	250mm	304不锈钢 304 stainless steel	1.12-1.42mm
LKXM-SC-5	母猪食槽 Sow trough	520mm	380mm	236mm	304不锈钢 304 stainless steel	1.12-1.42mm
LKXM-SC-6	母猪食槽 Sow trough	536mm	400mm	236mm	304不锈钢 304 stainless steel	1.12-1.42mm













采用食品级304不锈钢一体冲压成型,卷边加强,牢固耐用不伤猪,易清洗,固定方式灵活;大小尺寸和固定方式可根据客户需求定制。

Food grade 304 stainless steel body stamping molding, crimping strengthening, firm and durable does not hurt pigs, easy to clean, fixed flexible; The size and fixed mode can be customized according to customer requirements.

型号 Model	名称 Name	规格 Dimension	材质 Material	厚度 Thickness
LKXM-YS1-1	方形饮水碗 Square drinking water bowl	400x340x90	304不锈钢 304 stainless steel	0.78mm-1.12mm
LKXM-YS1-2	方形饮水碗 Square drinking water bowl	350x220x85	304不锈钢 304 stainless steel	0.78mm-1.12mm
LKXM-YS1-3	方形饮水碗 Square drinking water bowl	300x200x80	304不锈钢 304 stainless steel	0.78mm-1.12mm

型号 Model	名称 Name	直径 Diameter	深度 Depth	材质 Material	厚度 Thickness
LKXM-YS2-1	圆形饮水碗 Round drinking water bowl	215mm	170mm	304不锈钢 304 stainless steel	0.98mm-1.12mm
LKXM-YS2-2	圆形饮水碗 Round drinking water bowl	200mm	160mm	304不锈钢 304 stainless steel	0.98mm-1.12mm
LKXM-YS2-3	圆形饮水碗 Round drinking water bowl	155mm	125mm	304不锈钢 304 stainless steel	0.98mm-1.12mm

# Feed line W4444

### 料塔接料箱 Tower receiving box



型 号: LKXM-B-1

名 称:60单出口动力调节箱(专利产品)

变径材质: 201或304不锈钢/镀锌板 箱体材质: 201或304不锈钢/镀锌板

**用**: 60mm单一塞盘料线 **电 机**: 200w-550w减速电机

#### 特 点:

变径口周边开长条孔与料塔连接可360°任意角度可调, 电动控制,绞龙输送,定量均匀输出,无存料,不拱料; 外侧有观察窗,便于观察;内有阻料板,避免漏料。

外观大小及功能可根据客户需求定制。

Model: LKXM - B - 1

Name: 60 single outlet power regulation box (patented product)
Reducing material: 201or304 stainless steel/galvanized sheet
Case material: 201 or 304 stainless steel/galvanized sheet
Application: 60mm single plug plate material line

Motor: 200W-550W reduction motor

**Features**: the long strip hole around the diameter changing mouth can be connected with the material tower 360° adjustable Angle, electric control, twisting dragon conveying, quantitative uniform output, no stock, no arch material; There are observation Windows on the outside for easy observation; There is material blocking board to avoid material leakage.

Appearance size and function can be customized according to customer requirements.



型 号: LKXM-B-2

称: 60双出口动力型调节箱(专利产品)

**变径材质**: 201或304不锈钢/镀锌板 **箱体材质**: 201或304不锈钢/镀锌板

**西 (1) (2) (2) (3) (2) (3) (3) (4) (4) (4) (4) (4) (4) (5) (4)**

#### 特 点:

变径口周边开长条孔与料塔连接可360°任意角度可调, 电动控制,绞龙输送,定量均匀输出,无存料,不拱料; 外侧有观察窗,便于观察;内有阻料板,避免漏料,双 电机双绞龙,同时实现多料线同时供料;外观大小及功 能可根据客户需求定制。

Model: LKXM - B - 2

Name: 60 dual export power regulating box (patent product)
Reducing material: 201or 304 stainless steel/galvanized sheet
Case material: 201 or 304 stainless steel/galvanized sheet
Application: 60mm double plug plate material line

Motor: 200W-550W reduction motor

Features: the long strip hole around the diameter changing mouth can be connected with the material tower 360° adjustable Angle, electric control, twisting dragon conveying, quantitative uniform output, no stock, no arch material; There are observation Windows on the outside for easy observation; There is a material resistance plate, avoid leakage, double motor double twist dragon, at the same time to realize the feed line at the same time; Appearance size and function can be customized according to customer requirements.



### 料塔接料箱 Tower receiving box



号: LKXM-B-5

名 称: 一出口变频绞龙

变径材质: 201或304不锈钢/镀锌板

**主体材质**: 201或304不锈钢 **适** 用: 102mm塞盘料线 **电** 机: 1.1kw知名品牌

#### 持点:

变径口周边开长条孔与料塔连接可任意角度旋转; 配有手动插板,方便操作;外侧有观察窗,便于观察; 配有脚踏开关防翻料;

大小及功能可根据客户需求定制。

Model: LKXM - B - 5

Name: an outlet frequency conversion screw dragon

Reducing material: 201or304 stainless steel/galvanized sheet

Main material: 201 or 304 stainless steel

Application: 102mm plug plate material line

Motor: 1.1KW well-known brand

**Features**: Long strip holes around the diameter changing mouth can be connected with the material tower at any Angle; Equipped with manual insert board, convenient operation; There are observation Windows on the outside for easy observation; Equipped with foot switch to prevent tipping; Size and function can be customized according to customer requirements.



号: LKXM-B-6

名 称: 双出口变频绞龙

变径材质: 201或304不锈钢/镀锌板

**箱体材质**: 201或304不锈钢 **适** 用: 102mm塞盘料线 **电** 机: 1.1kw知名品牌

#### 特点

变径口周边开长条孔与料塔连接可360°任意角度旋转; 配有手动插板,方便操作;外侧有观察窗,便于观察; 配有脚踏开关自带防翻料功能;大小及功能可根据客户 需求定制。

变频绞龙:根据控制料线数量多少,可以根据客户实际要求制作102和160料线一出口,双出口,三出口,四出口等。

Model: LKXM - B - 6

Name: Double outlet frequency conversion twisting dragon Reducing material: 201 or 304 stainless steel/galvanized sheet

Main material: 201 or 304 stainless steel
Application: 102mm plug plate material line

Motor: 1.1KW well-known brand

Features: Long strip holes around the diameter changing mouth can be connected with the material tower to rotate 360° at any Angle; Equipped with manual insert board, convenient operation; There are observation Windows on the outside for easy observation; Equipped with foot switch with anti-tipping function; Size and function can be customized according to customer requirements.

Frequency conversion: according to the number of control material line, according to the actual requirements of customers to produce 102 and 160 material line one export, double export, three export, four export, etc.



## 料塔接料箱 Half-stop bar



型 号: LKXM-B-7

变径材质: 201或304不锈钢/镀锌板

主体材质: 201或304不锈钢

适 用: 60mm单一塞盘料线

#### 特点

变径口周边开长条孔与料塔连接可360°任意角度旋转; 配有手动插板,方便操作;大小及功能可根据客户需求 定制。

Model: LKXM - B - 7

Name: 60 single outlet non-automatic blanking box

Reducing material: 201or 304 stainless steel/galvanized sheet

Main material: 201 or 304 stainless steel

Application: 60mm single plug plate material line

**Features**: Long strip holes around the diameter changing mouth can be connected with the material tower to rotate 360° at any Angle; Equipped with manual insert board, convenient operation; Size and function can be customized according to customer requirements.



型 号: LKXM-B-8

称: 60双出口非自动下料箱

变径材质: 201或304不锈钢/镀锌板

主体材质:201或304不锈钢

适 用: 60mm双塞盘料线

### 特 点:

变径口周边开长条孔与料塔连接可360°任意角度旋转; 配有手动插板,方便操作;大小及功能可根据客户需求 定制。

Model: LKXM - B - 8

Name: 60 double outlet non-automatic blanking box

Reducing material: 201 or 304 stainless steel/galvanized sheet

Main material: 201 or 304 stainless steel

Application: 60mm double plug plate material line

Features: Long strip holes around the diameter changing mouth can be connected with the material tower to rotate 360° at any Angle; Equipped with manual insert board, convenient operation; Size and function can be customized according to customer requirements.



### 料塔接料箱 Half-stop bar



型 号: LKXM-B-9

名 称: 75绞龙单出口非自动下料箱

变径材质: 201或304不锈钢/镀锌板

主体材质: 201或304不锈钢

适用: 75绞龙料线

电 机: 1.1kw知名品牌

特 点:

变径口周边开长条孔与料塔连接可360°任意角度可调; 配有手动插板,方便操作;大小及功能根据客户需求可 定制单出口,双向双出口,双向三出口及双向四出口。



**号**: LKXM-B-11 **称**: 绞龙接料斗

材 质: 201或304不锈钢; 板材厚度为2mm;

盖子厚度为1.5mm

电 机: 单相380V 0.75-1.5Kw, 速比: 30:1 50:1

控制装置:行程开关

下料口直径: 75mm

**西**用:60或75绞龙料线末端,绞龙料线驱动

和接料装置

大小及功能可根据客户需求定制。

Model: LKXM - B - 9

Name: 75 dragon single outlet non automatic blanking box Reducing material: 201 or 304 stainless steel/galvanized sheet

Main material: 201 or 304 stainless steel

Application: 75 screw dragon material line

**Features**: Long strip holes around the diameter changing mouth can be connected with the tower of 360° adjustable Angle; Equipped with manual insert board, convenient operation; Size and function can be customized according to customer demand single outlet, two-way double outlet, two-way three outlet and two-way four outlet.

Model: LKXM - B- 11

Name: screw dragon hopper

Material: 201 or 304 stainless steel; Sheet thickness is 2mm; The thickness of the cover is 1.5mm

Motor: single phase 380V 0.755-1.5KW, speed ratio: 30:1 50:1

Control device: travel switch

Feeding orifice diameter: 75mm

**Application**: 60 or 75 stranded wire end, stranded wire drive and feeding device

Size and function can be customized according to customer requirements

# Feed Line W144

## 料塔接料箱 Half-stop bar



型 号: LKXM-B-12

名 称: 60双出口非自动下料箱

特 点:

斜面式插板,不存料,可震动,不积料,方便操作。大小及功能可根据客户需求定制。

Model: LKXM - B - 12

Name: 60 double outlet non-automatic blanking box

Material: 201 or 304 stainless steel

Application: 60mm double plug plate material line

Features: Bevel insert plate, no material storage, vibration, no material accumulation, easy to operate

Size and function can be customized according to customer requirements



### 管接 Pipe connection



号: LKXM-G-2

名 称: 102管接

材质: 2.0mm镀锌板,一体成型

长 度: 200mm

密 封 垫: 2.5mm 硅胶垫 适 用: 102料线管连接

Model: LKXM - G - 2

Name: 102 pipe connection

Material: 2.0mm galvanized sheet, integrated

Length: 200 mm

Sealing pad: 2.5mm silicone pad

Application: 102 material line pipe connection



号: LKXM-G-3

名 称: 160管接

材 质: 3.0mm镀锌板,两片式

长 度: 400mm

密 封 垫: 2.5mm 硅胶垫 适 用: 160料线管连接

Model: LKXM - G - 3


Name: 160 pipe connection

Material: 3.0mm galvanized sheet, two pieces

Length: 400 mm

Sealing pad: 2.5mm silicone pad

Application: 160 material line pipe connection

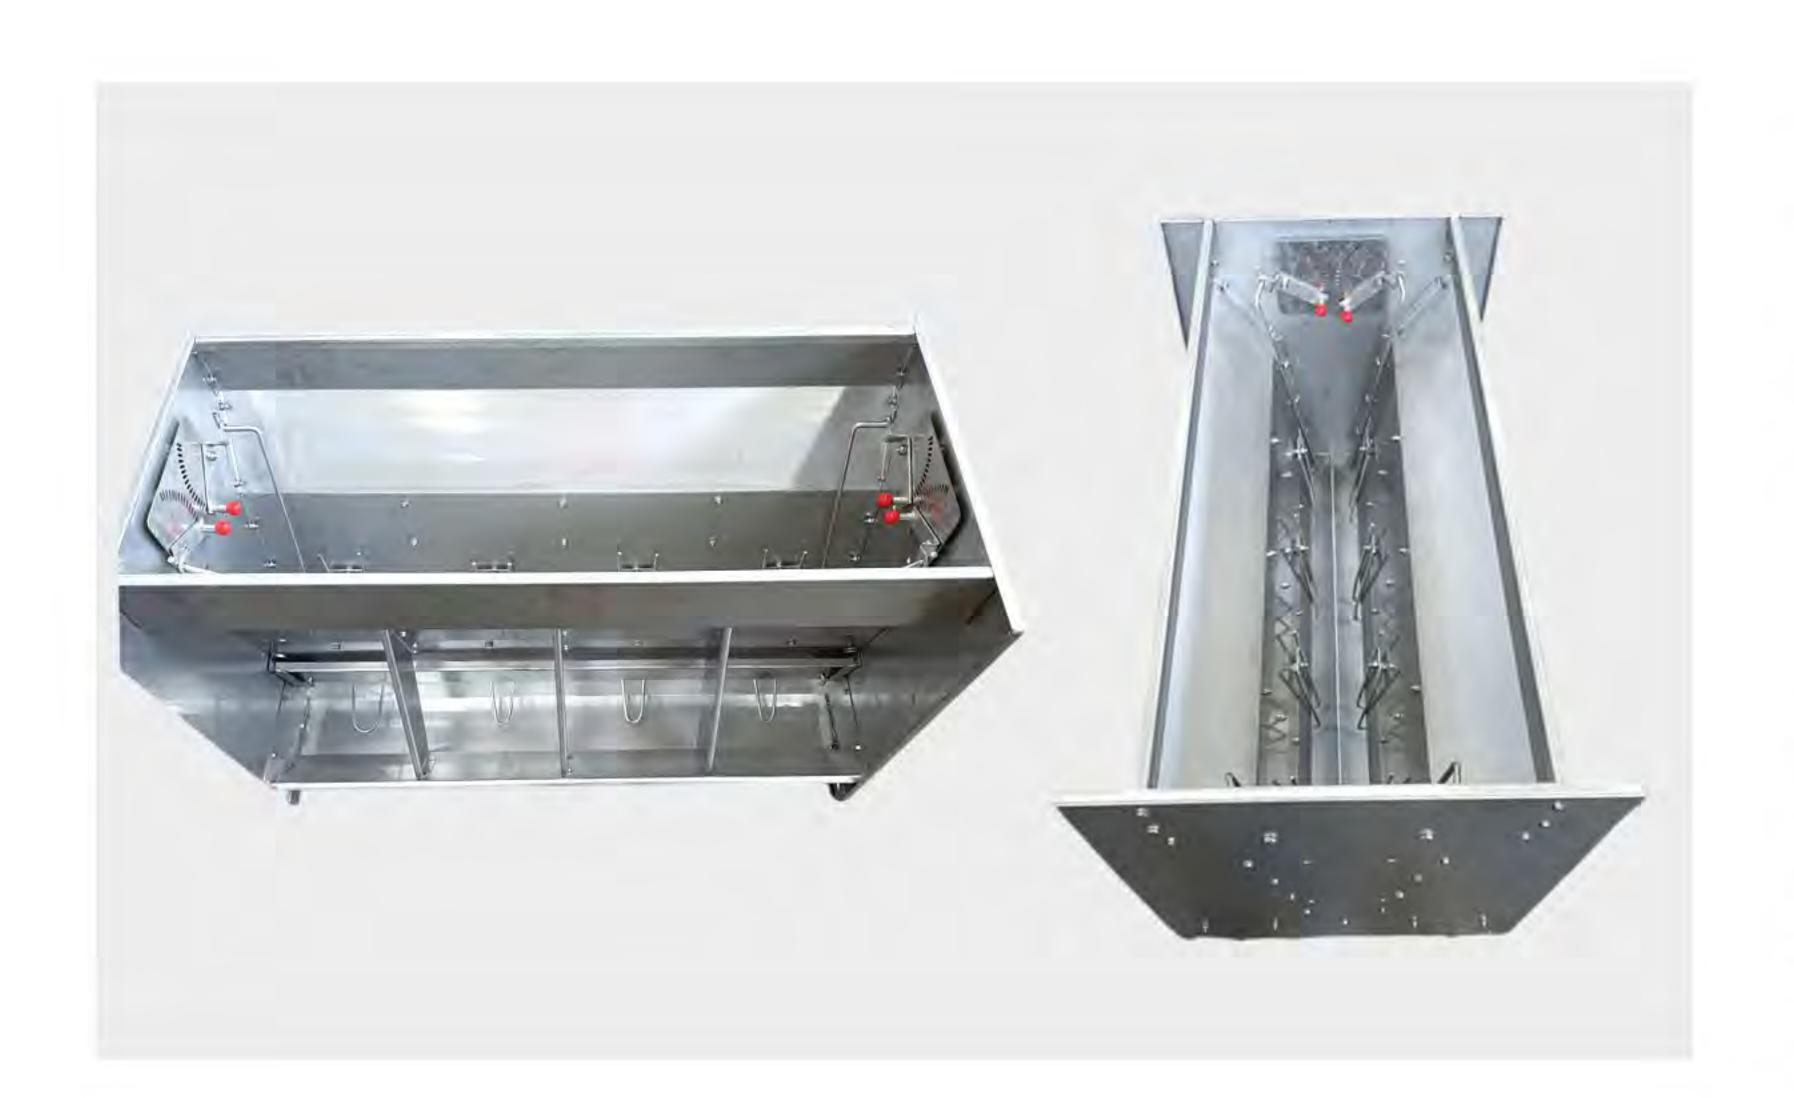


双面料槽 : 长形料盆,304不锈钢折弯组装,底部圆弧设计,易采食,不伤猪,中间大容量储料,一次下料,可供较长时间饮食,一槽多用,适用于范围较广。

Double fabric trough: long basin, 304 stainless steel bending assembly, bottom arc design, easy to eat, not hurt pigs, large capacity storage in the middle, one feeding, for a longer time to eat, a groove multi-purpose, suitable for a wide range.



# 驱动装置 Drive device

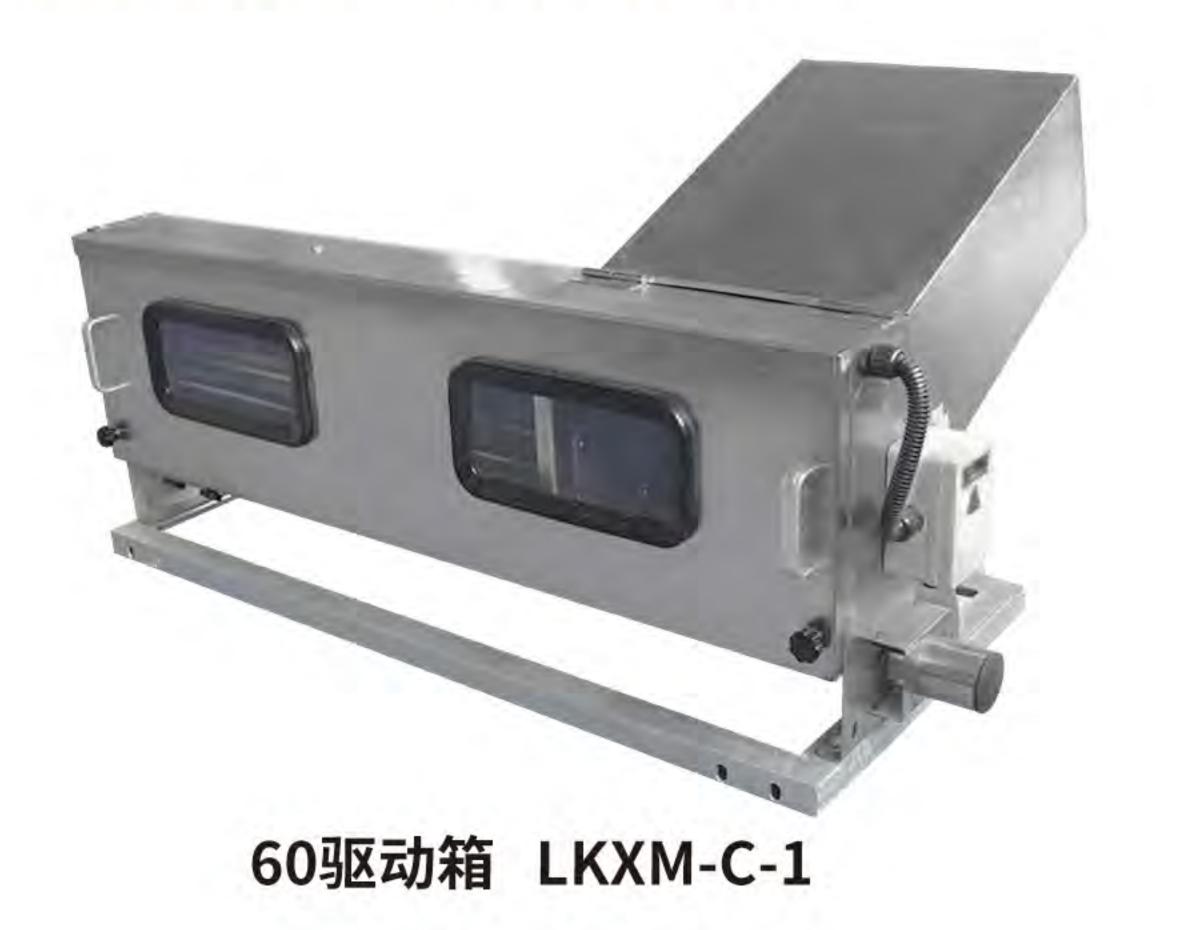



102驱动箱 LKXM-C-2

160驱动箱 LKXM-C-3

名称/型号	60驱动箱	102驱动箱	160驱动箱	
	60 Drive box	102 Drive box	160 Drive box	
Name/Model	LKXM-C-1	LKXM-C-2	LKXM-C-3	
箱体规格 Box dimension	1000*200*423	1500*365*620	1900*530*835	
箱体材质 Box material	2.0mm 201或304不锈钢 201 or 304 stainless steel	2.0mm 201或304不锈钢 201 or 304 stainless steel	2.0mm 201或304不锈钢 201 or 304 stainless steel	
减速电机	380V 1: 40	380V 1: 50	380V 1: 50	
Reduce motor	1.5-2.2kw	4kw	9.2KW	
滑动结构	弹簧式	配重式	配重式	
Slide	Spring type	Balance type	Balance type	
输送量 Delivery capacity	1.2T/H	5T/H	15T/H	
驱动轮材质	铸钢	铸钢	铸钢	
Drive wheel material	Cast steel	Cast steel	Cast steel	
被动轮材质	铸钢	铸钢	铸钢	
Driven wheel material	Cast steel	Cast steel	Cast steel	
防雨罩 Rain-proof cover	1.0-1.5mm 304不锈 1.0-1.5mm 304 stainless steel 580*450*300	1.0-1.5mm 304不锈 1.0-1.5mm 304 stainless steel 680*386*300	1.0-1.5mm 304不锈 1.0-1.5mm 304 stainless steel 1390*550*300	



# 塞链 Plug chain









名称/型号	40塞链 40 Plug chain	60塞链 60 Plug chain	102塞链 102 Plug chain	160塞链 160 Plug chain
Name/Model	LKXM-D-1	LKXM-D-2	LKXM-D-3	LKXM-D-3
链扣直径 Chain button diameter	5.0mm	5.0mm	7.0mm	11.0mm
链扣材质 Chain button material	20Mn2	20Mn2	20Mn2	20Mn2
索盘直径 Cable wheel diameter	32.0mm	44.0mm	74.0mm	120.0m
索盘间距 Cable wheel space	70mm	70mm	92mm	144mm
索盘材质 Cable wheel material	尼龙66或尼龙6 Nylon 66 or nylon 6			
索盘厚度 Cable wheel thickness	6.0mm	7.0mm	9.0mm	11.0mm
输送距离 Conveying distance	300m	300m	400m	300m
使用范围 Application range	加药系统 Dosing system	60料线 60 feeding line	102料线 102 feeding line	160料线 160 feeding line





型 号: LKXM-D-1

名 称:一进一出电动转接料斗 90°

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1mm

电 机: 单相220V 120W, 速比: 100: 1

料 管: 60\*1.5mm 304不锈钢食品级

控制装置: 磁性开关、 行程开关

**适** 用: 60塞盘单料线转接60塞盘单料线

外形尺寸和料线管距离可根据客户要求定制。



型 号: LKXM-D-2

称: 二进一出电动转接料斗 90°

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1mm

电 机: 单相220V 120W, 速比: 100: 1

料 管: 60\*1.5mm 304不锈钢食品级

控制装置: 磁性开关、 行程开关

适用: 60塞盘单料线转接60塞盘单料线

外形尺寸和料线管距离可根据客户要求定制。

Model: LKXM - D - 1

Name: One in one out electric transfer hopper 90°

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The cover thickness is 1mm

Motor: single-phase 220V 120W, speed ratio: 100:1

Feed tube: 60\*1.5mm 304 stainless steel food grade

Control device: magnetic switch, travel switch

Application: 60 plug plate single material line conversion 60

plug plate single feeding line.

Dimensions and feeding tube distance can be customized according to customer requirements

Model: LKXM - D - 2

Name: Two in one out electric transfer hopper 90°

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The cover thickness is 1mm

Motor: single-phase 220V 120W, speed ratio: 100:1

Feed tube: 60\*1.5mm 304 stainless steel food grade

Control device: magnetic switch, travel switch

**Application**: 60 plug plate single material line conversion 60 plug plate single feeding line.

Dimensions and feeding tube distance can be customized according to customer requirements



### 转接料斗装置 Transfer hopper device



⊎ 号: LKXM-D-3

名 称: 塞盘搭接绞龙接料斗

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1.5mm

电 机: 单相220V 120W, 速比: 100: 1

进料管: 60\*1.5mm 304不锈钢食品级

下料管: 75mm 304不锈钢食品级

控制装置: 行程开关

**适** 用: 60塞盘料线转接75绞龙料线

外形尺寸和料线管距离可根据客户要求定制。

Model: LKXM - D - 3

Name: Plug plate screw feeding connected hopper

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The cover thickness is 1mm

Motor: single-phase 220V 120W, speed ratio: 100:1

Feed input tube: 60\*1.5mm304 stainless steel food grade

Feeding downside tube: 75mm304 stainless steel food grade Control device: magnetic switch, travel switch

**Application**: 60 plug plate single feeding line conversion 60 plug plate single feeding line.

Dimensions and feeding tube distance can be customized ac-

cording to customer requirements

号: LKXM-D-4

称: 绞龙搭接绞龙接料斗(平行式)

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1.5mm

电 机: 单相380V 0.75-1.5Kw, 速比: 30:1 50:1

控制装置:行程开关

进料管: 75\*2.5mm304不锈钢食品级

下料管: 75\*2.5mm304不锈钢食品级

**适** 用: 75绞龙料线料线转接75绞龙料线

外形尺寸和料线管距离可根据客户要求定制。

Model: LKXM - D - 4

Name: screw tower connected with screw feeding hopper (Parallel)

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The cover thickness is 1mm

Motor: single-phase 380V 0.75-1.5Kw, speed ratio: 30:1 50:1

Feed input tube: 75\*2.5mm304 stainless steel food grade
Feeding downside tube: 75\*2.5mm304 stainless steel food grade

Control device: Travel switch

Application: 60 plug plate single feeding line conversion 60

plug plate single feeding line.

Dimensions and feeding tube distance can be customized according to customer requirements





型 号: LKXM-D-5

8 称:绞龙搭接绞龙接料斗(垂直式)

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1.5mm

电 机: 单相380V 0.75-1.5Kw, 速比: 30:1 50:1

进料管: 75\*2.5mm 304不锈钢食品级

下料管: 75\*2.5mm 304不锈钢食品级

控制装置: 行程开关

**适** 用: 75绞龙料线料线转接75绞龙料线

外形尺寸和料线管距离可根据客户要求定制。

Model: LKXM - D - 5

Name: screw tower connected with screw feeding hopper (Vertical)

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The cover thickness is 1mm

Motor: single-phase 380V 0.75-1.5Kw, speed ratio: 30:1 50:1 Feed input tube: 75\*2.5mm304 stainless steel food grade Feeding downside tube: 75\*2.5mm304 stainless steel food grade Control device: Travel switch

**Application**: 75 plug plate single feeding line conversion 75 plug plate single feeding line

Dimensions and feeding tube distance can be customized according to customer requirements.



型 号: LKXM-D-6

的 称: 102电动转接料斗

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1.5mm

电 机: 单相220V 120W, 速比: 100: 1

**管**: 102\*2mm 304不锈钢食品级

控制装置: 行程开关

**西** 用: 102塞盘料线转接102塞盘单料线

变径口周边开长条孔与料塔连接可360°任意角度可调,

外形尺寸和料线管距离可根据客户要求定制。

Model: LKXM - D - 6

Name: 102 Electric transfer hopper

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The thickness of the cover is 1.5mm

**Motor**: single-phase 220V 120W, speed ratio: 100:1 **Feed tube**: 102\*2mm304 stainless steel food grade

Control device: travel switch

**Application**: 102 plug plate material line conversion 102 plug plate single material line

The long strip holes around the diameter changing mouth can be connected to the tower with 360° adjustable Angle.

Dimensions and material tube distance can be customized according to customer requirements.



### 转接料斗装置 Transfer hopper device



号: LKXM-D-7

名 称: 160一进一出转接料斗


材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1mm

料 管: 160\*2.5mm 304不锈钢食品级

适用: 160塞盘料线转接160塞盘单料线

手动控制,变径口周边开长条孔与料塔连接可360°任 意角度可调,外形尺寸和料线管距离可根据客户要求 定制。

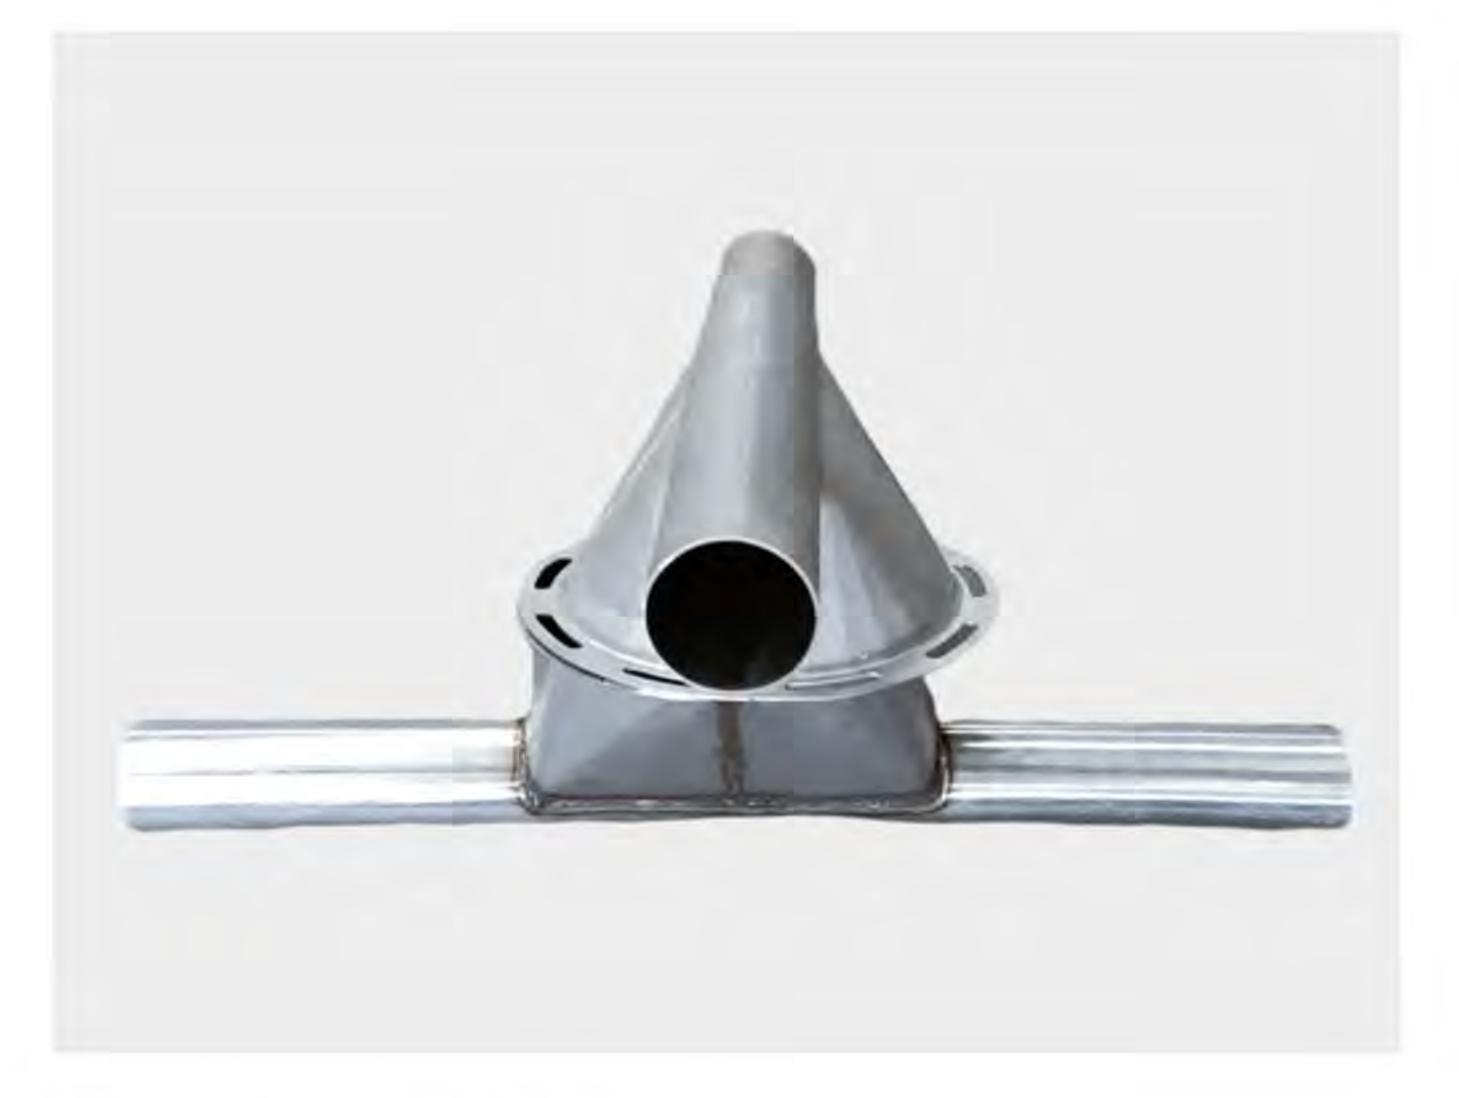

号: LKXM-D-8

名 称: 60一进一出非自动转接料斗

材 质: 201或304不锈钢

料 管: 60\*1.5mm不锈钢食品级

适用: 60塞盘单料线转接60塞盘单料线

法兰周边开长条孔与料塔连接可360°任意角度可调, 外形尺寸和料线管距离可根据客户要求定制。

Model: LKXM - D - 7

Name: 160 one in one out transfer hopper

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The cover thickness is 1mm

Feed tube: 160\*2.5mm304 stainless steel food grade

Application: 160 plug plate feeding line conversion 160 plug

plate single material line

Manual control, long strip holes around the diameter changing mouth can be connected with the feed tower 360° adjustable Angle.

Dimensions and material tube distance can be customized according to customer requirements.

Model: LKXM - D - 8

Name: 60 one in one out non automatic transfer hopper

Material: 201 or 304 stainless steel

Material tube: 60\*1.5mm stainless steel food grade

**Application**: 60 plug plate single material line conversion 60 plug plate single material line

Flange surrounding open strip holes and tower connection can be 360° arbitrary Angle adjustable.

Dimensions and material tube distance can be customized according to customer requirements.





型 号: LKXM-D-9

**称**:60二进一出非自动转接料斗

材 质: 201或304不锈钢;

电 机: 单相380V 0.75-1.5Kw, 速比: 30:1 50:1

料 管: 60\*1.5mm不锈钢食品级

适用: 60塞盘双料线转接60塞盘单料线

外形尺寸和料线管距离可根据客户要求定制。



型 号: LKXM-D-10

**称**: 60三通阀

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1mm

电 机: 单相220V120W,速比: 100: 1

下料口直径: 102mm

控制装置: 行程开关

**用**: 60塞盘料线加药系统

外形尺寸可根据客户要求定制。

Model: LKXM - D - 9

Name: 60 two in one out non automatic transfer hopper

Material: 201 or 304 stainless steel

Material tube: 60\*1.5mm stainless steel food grade

Application: 60 plug double material line conversion 60 plug

single material line

Dimensions and material tube distance can be customized according to customer requirements.

Model: LKXM - D - 10

Name: 60 three-way valve

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The cover thickness is 1mm

Motor: single-phase 220V 120W, speed ratio: 100:1

Feeding mouth diameter: 102mm.

Control device: travel switch

Application: 60 stopper line dosing system

Dimensions can be customized according to customer re-

quirements.



### 转接料斗装置 Transfer hopper device



号: LKXM-D-11

3 称: 102电动三通阀

材 质: 201或304不锈钢;

板材厚度为2mm;盖子厚度为1.5mm

电 机: 单相220V 120W, 速比: 100: 1

下料口直径: 168mm

控制装置: 磁性开关、行程开关

适用: 102塞盘料线转接单元前料塔

外形尺寸可根据客户要求定制。

型 号: LKXM-D-12

3 称: 160电动三通阀

质: 201或304不锈钢; 板材厚度为2mm;

盖子厚度为1.5mm;

电 机: 单相220V 200W,速比: 100: 1;

下料口直径: 200mm

控制装置: 磁性开关、行程开关

适用: 160塞盘料线转接单元前料塔

外形尺寸可根据客户要求定制。

Model: LKXM - D - 11

Name: 102 Electric three-way valve

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The thickness of the cover is 1.5mm

Motor: single-phase 220V 120W, speed ratio: 100:1

Feeding mouth diameter: 168mm

Control device: magnetic switch, travel switch

**Application**: 102 plug tray feed line transfer unit feed tower Dimensions can be customized according to customer re-

quirements.

Model: LKXM - D - 12

Name: 160 Electric three-way valve

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

Cover thickness is 1.5mm;

Motor: single-phase 220V 200W, speed ratio: 100:1;

Feeding mouth diameter: 200mm.

Control device: magnetic switch, travel switch

**Application**: 160 plug tray feed line conversion unit feed tower Dimensions can be customized according to customer re-

quirements.





型 号: LKXM - D - 13

名 称: 102非自动三通阀

质: 201或304不锈钢; 板材厚度为2mm;

盖子厚度为1mm;

**料 管**: 102\*2mm 304不锈钢食品级 **盾**: 102\*2mm 304不锈钢食品级 **盾**: 102\*2 盘料线转接单元前料塔

外形尺寸和料线管距离可根据客户要求定制。

Model: LKXM - D - 13

Name: 102 Non-automatic three-way valve

Material: 201 or 304 stainless steel; Sheet thickness is 2mm;

The thickness of the lid is 1mm;

Feed tube: 102\*2mm304 stainless steel food grade

**Application**: 102 plug tray feed line transfer unit feed tower Dimensions and material tube distance can be customized

according to customer requirements.

## 转角轮 Corner wheel

可根据客户具体需求定制不同材质和规格转角轮。

Can be customized according to customer specific needs of different materials and specifications corner wheel.



号: LKXM-E-1

称: 40转角轮 90°

外 売: 2.0mm 304不锈钢

内 轮:铸钢材质,外径230mm

承: 内置,双面轴承

轴: 304不锈钢, 直径17mm

Model: LKXM - E - 1
Name: 40 turnwheel 90°

Case: 2.0mm304 stainless steel

Inner wheel: cast steel material, outer diameter 230mm

Bearing: Built-in, double-sided bearing

Shaft: 304 stainless steel, diameter 17mm



### 转角轮 Corner wheel



型 号: LKXM-E-2

名 称: 60转角轮 90°

外 売: 2.0mm 304不锈钢

内 轮:铸钢材质,外径230mm

轴 承: 内置,双面轴承

轴: 304不锈钢, 直径20mm

Model: LKXM - E - 2

Name: 60 turnwheel 90°

Case: 2.0mm304 stainless steel

Inner wheel: cast steel material, outer diameter 230mm

Bearing: Built-in, double-sided bearing

Shaft: 304 stainless steel, diameter 20mm



型 号: LKXM-E-3

3 称: 60转角轮 90°

内 轮:铸钢材质,外径230mm

轴 承: 内置,双面轴承

轴: 304不锈钢, 直径20mm

Model: LKXM - E - 3

Name: 102 Turn wheel 90°
Case: 2.0mm304 stainless steel

Inner wheel: cast steel material, outer diameter 300mm

Bearing: external, double-sided bearing

Shaft: 304 stainless steel, 25mm in diameter

# Feed Line W144

### 转角轮 Corner wheel



号: LKXM-E-4

名 称: 102转角轮 90°

外 壳: 2.0mm 304不锈钢

内 轮:铸钢材质,外径300mm

轴 承: 内置,双面轴承

轴: 304不锈钢, 直径25mm

Model: LKXM - E - 4 Name: 90 turnwheel 90°

Case: 2.0mm304 stainless steel

Inner wheel: cast steel material, outer diameter 300mm

Bearing: Built-in, double-sided bearing Shaft: 304 stainless steel, diameter 25mm



型 号: LKXM-E-5

名 称: 160转角轮 90°

外 壳: 3.0mm 304不锈钢

内 轮:铸钢材质,外径480mm

轴 承: 内置,双面轴承

轴: 304不锈钢, 直径35mm

Model: LKXM - E - 5
Name: 160 Turn wheel 90°
Case: 3.0mm304 stainless steel

Inner wheel: cast steel material, outer diameter 480mm

Bearing: external, double-sided bearing

Shaft: 304 stainless steel, 35mm in diameter

# 下料系统零部件 Feeding system



型 号: LKXM-F-1

名 称: 计量桶

容 积: 6L 材质: PP (聚丙)

出料口: 直径75mm 搭配: 60塞盘料线

Model: LKXM - F - 1
Name: Metering barrel

Volume: 6L Material: PP (polypropylene)

Discharge port: 75mm in diameter

Match: 60 plug coil line



# 下料系统零部件 Feeding system



型号: LKXM-F-2名称: 连接喇叭口材质: PP (聚丙)上口: 直径140mm

搭配:60下料管

Model: LKXM - F - 2
Name: Connecting bell port
Material: PP (polypropylene)
Upper mouth: diameter 140mm

Match: 60 feeding tube



달 号: LKXM-F-3

名 称:红握手(拉绳式下料三通)

材质: PP (聚丙)上口: 直径60mm搭配: 75下料管

Model: LKXM - F - 3

Name: Red handshake (pulling rope type cutting tee)

Material: PP (polypropylene)
Upper mouth: diameter 60mm
Match: 75 blanking pipe

### 管接 Pipe connection



号: LKXM-G-1

**和**: 60管接

材 质: 1.2mm镀锌板,一体成型

密 封 垫: 2.5mm硅胶垫

长 度: 100mm

**用**:60料线管连接

Model: LKXM - G - 1
Name: 60 pipe connection

Material: 1.2mm galvanized sheet, integrated


Sealing pad: 2.5mm silicone pad

Length: 100 mm


Application: 60 material line pipe connection

# Feed Line W44 44

## 塞盘料线 Plug plate feeding line

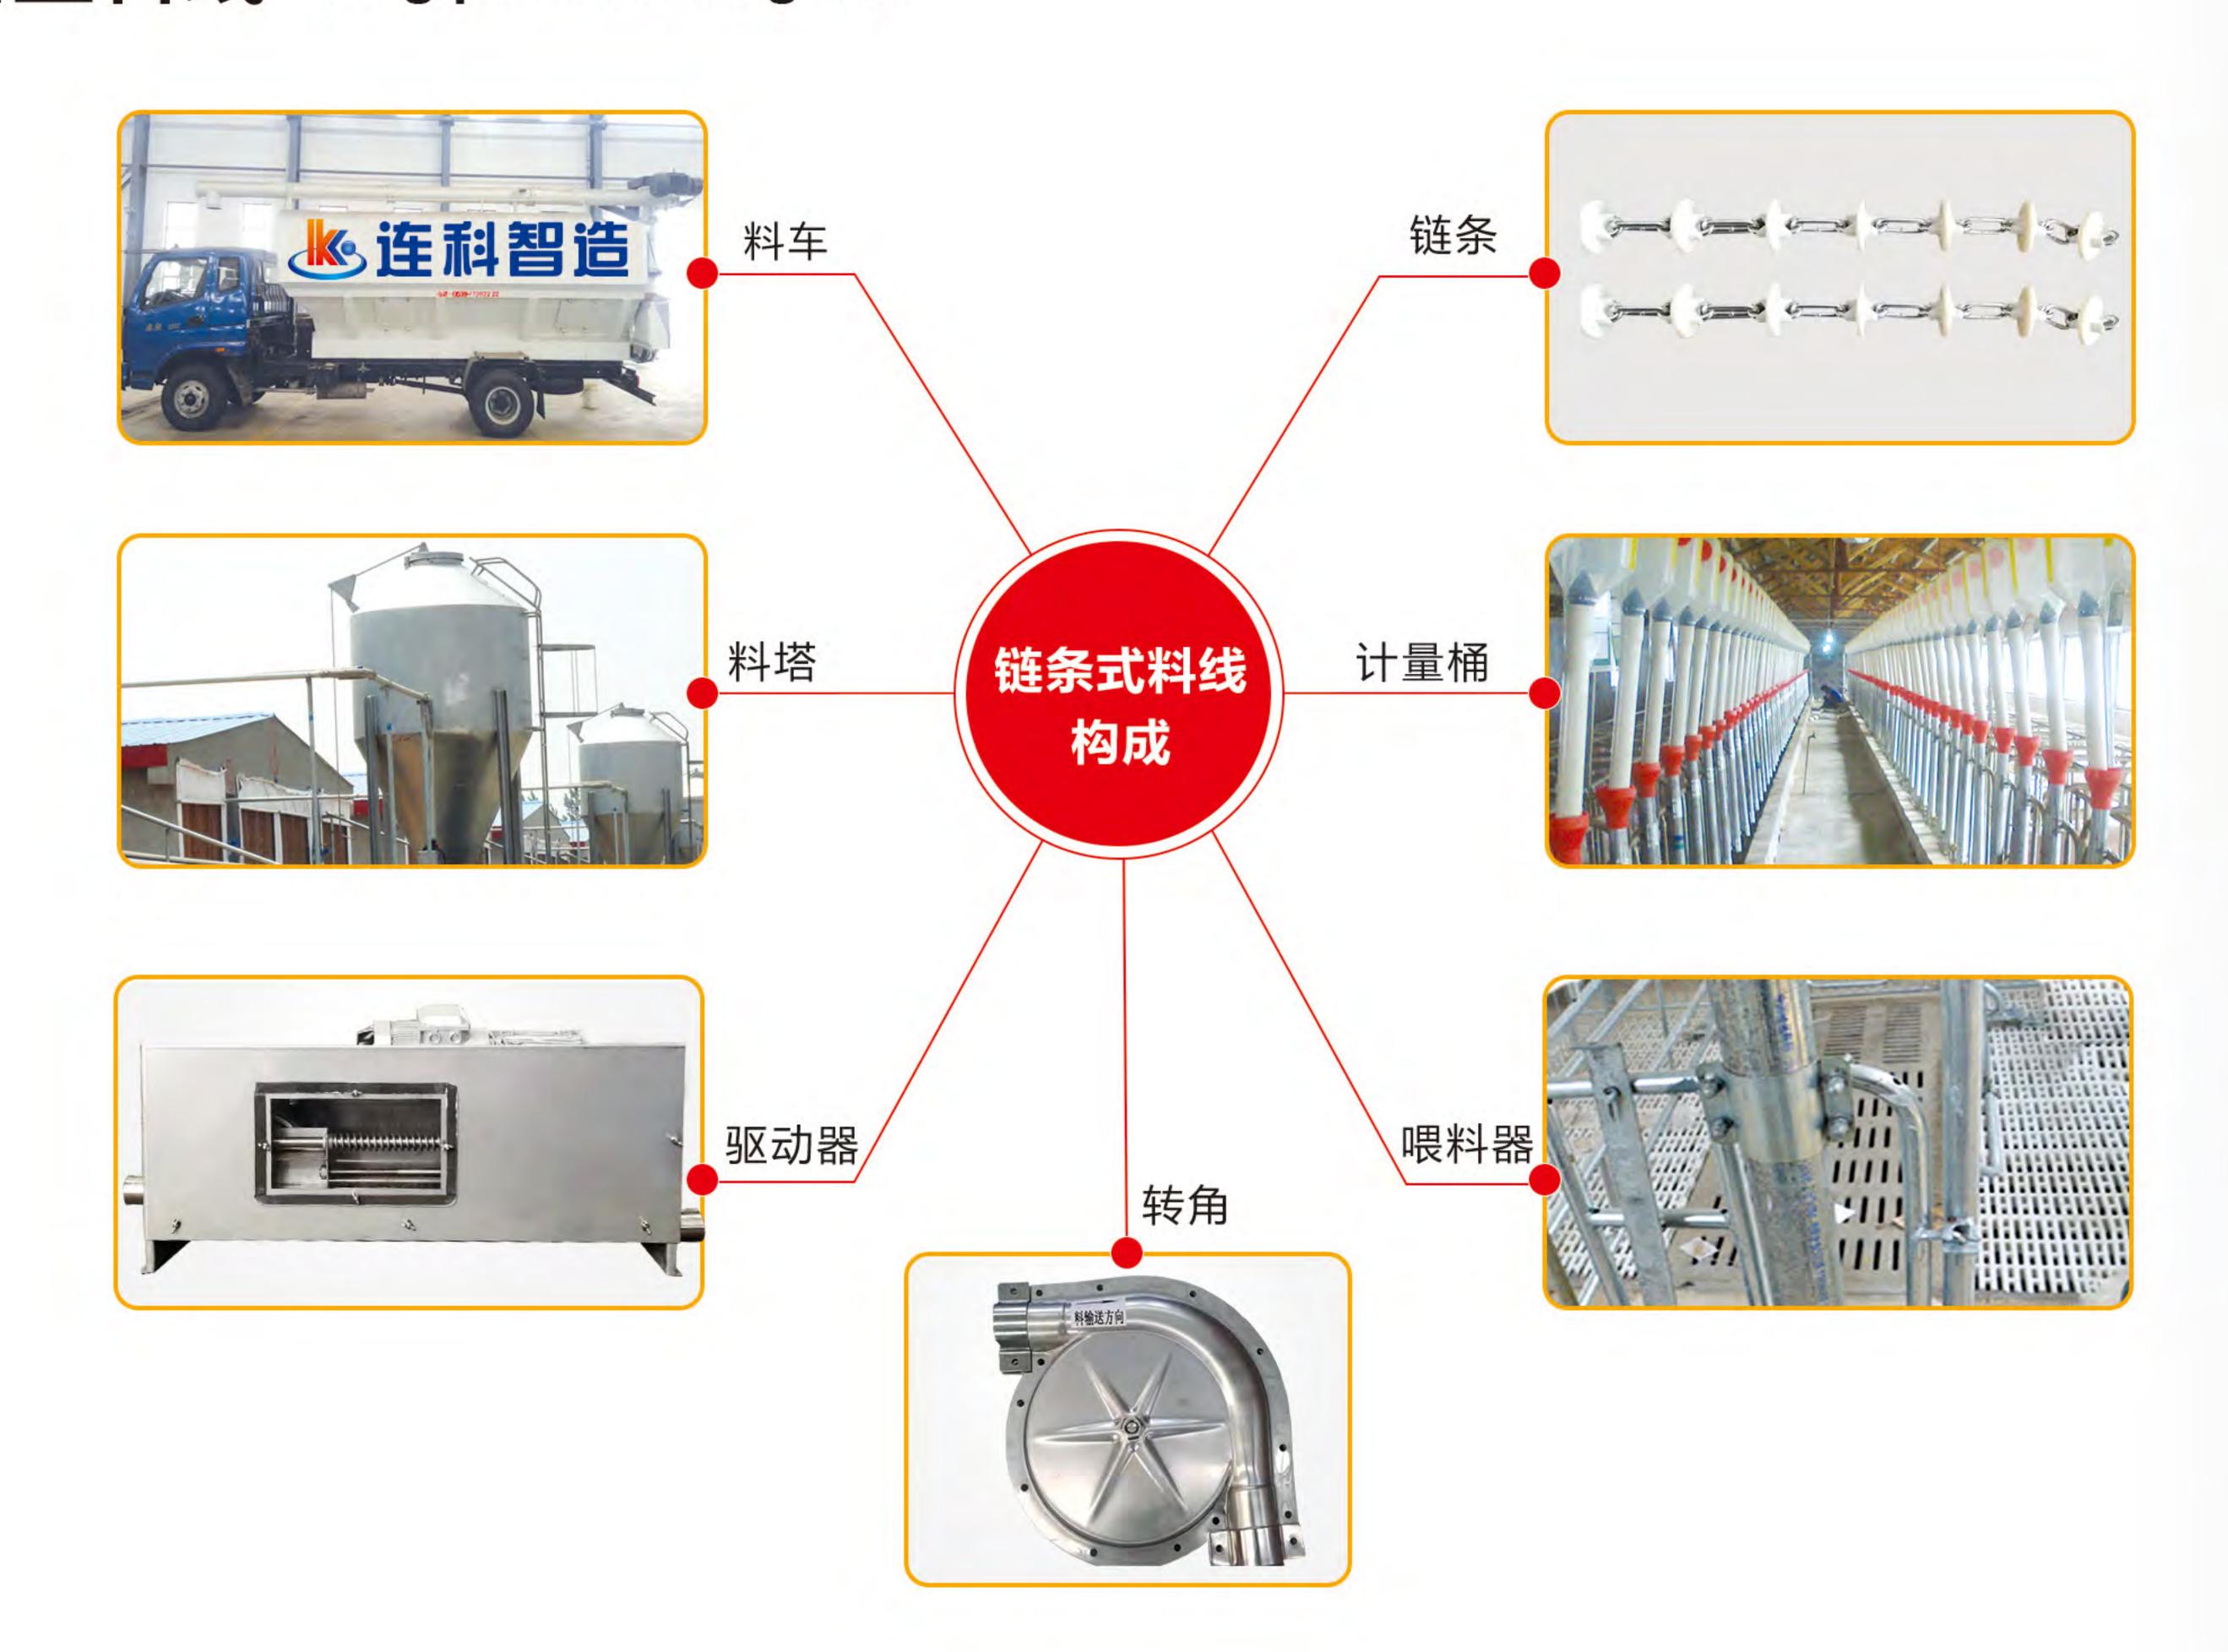

# 绞龙料线 screw feeding line

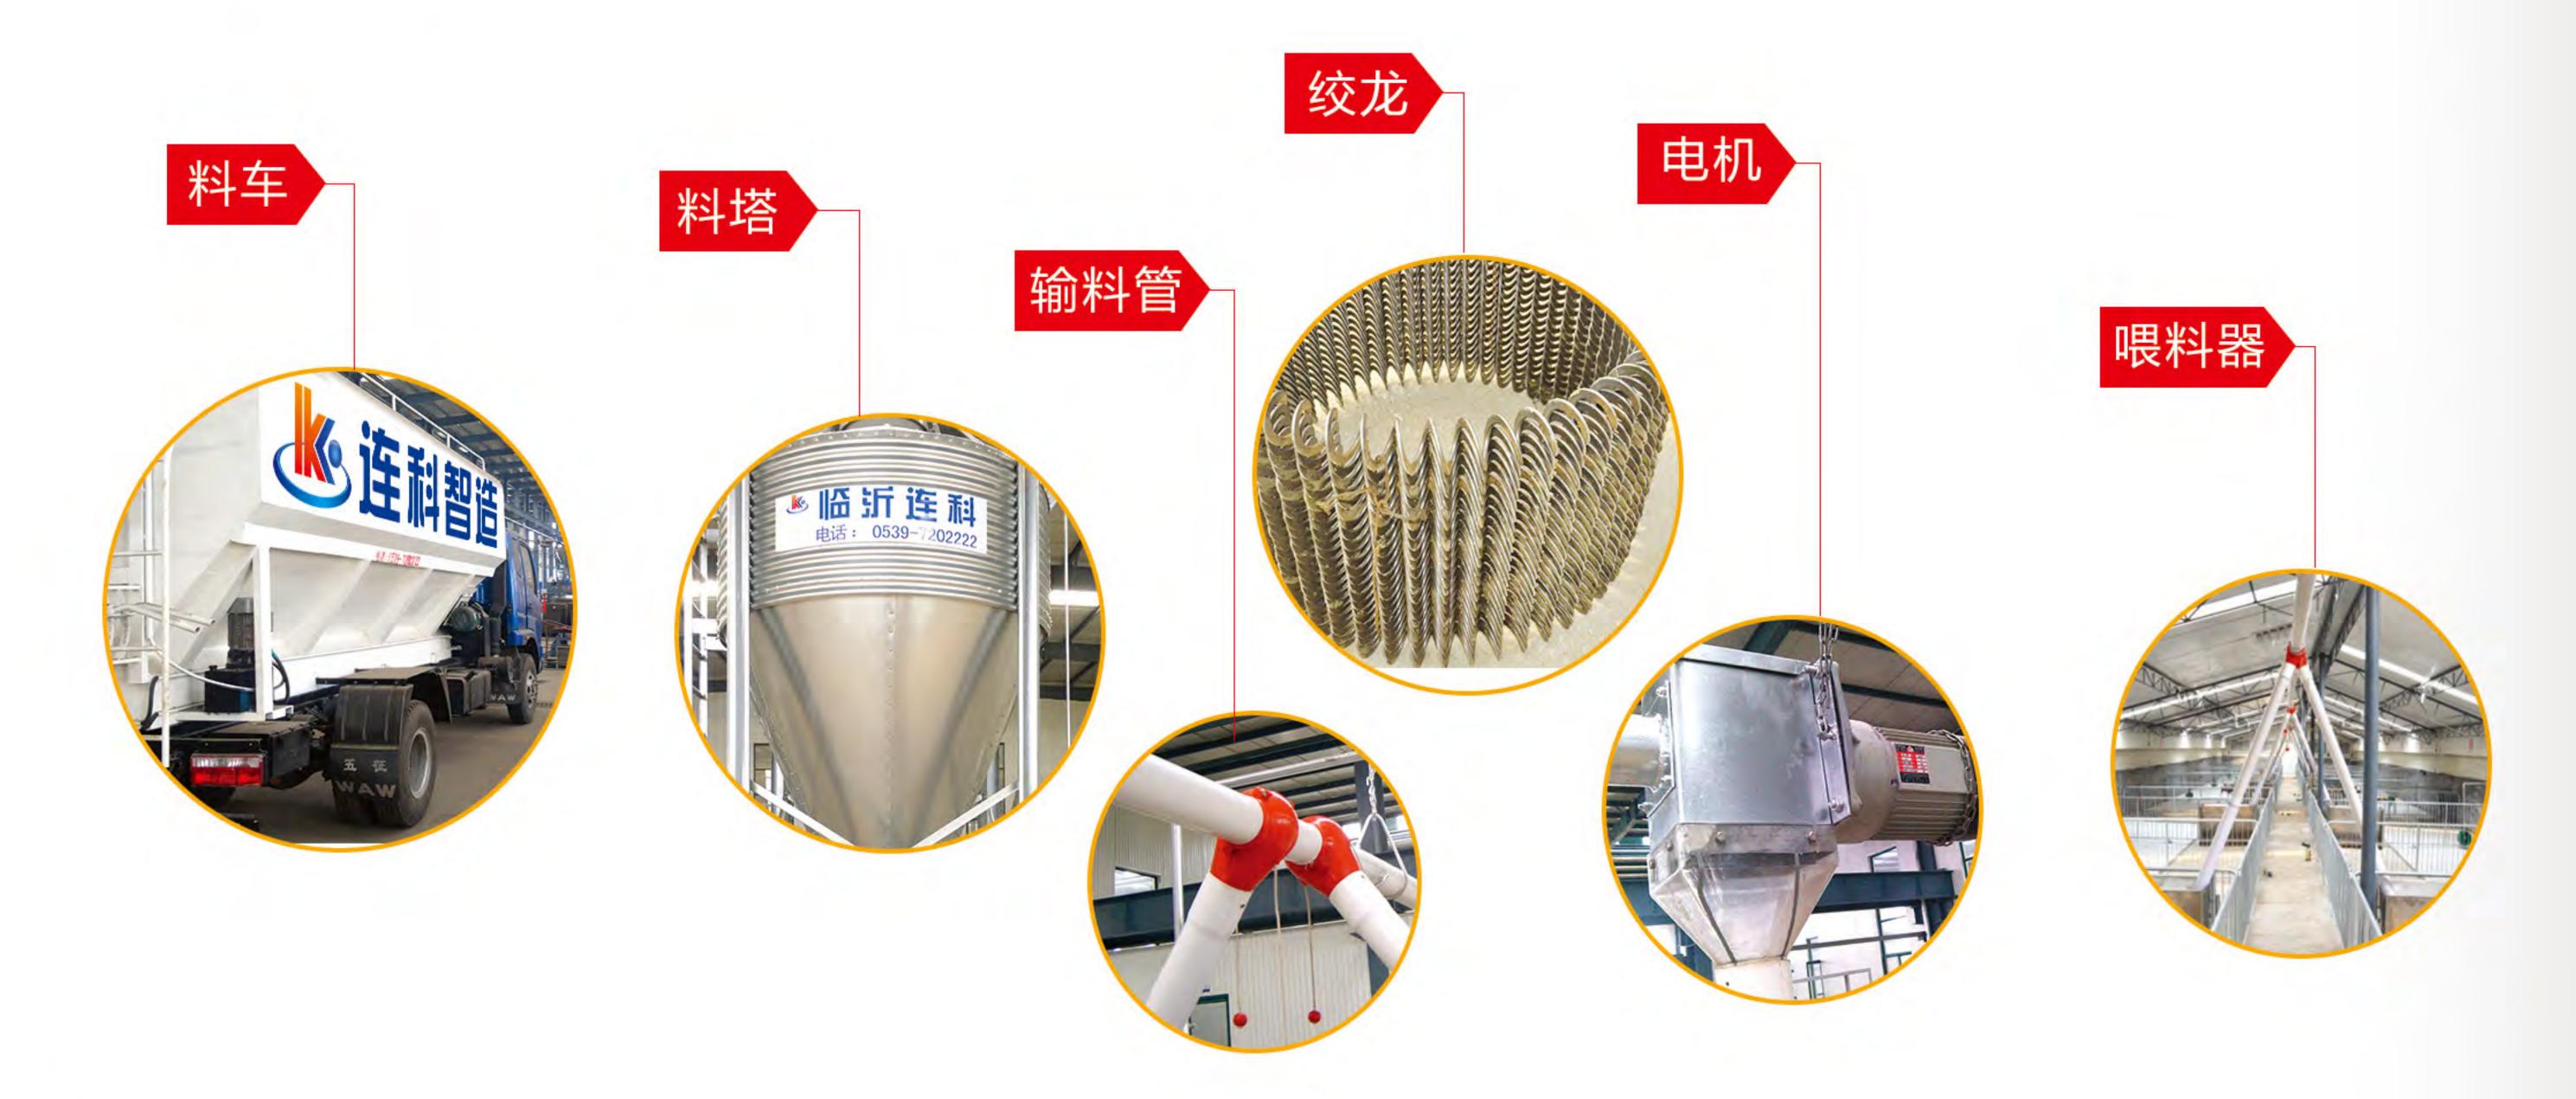

# Other products display 阿巴萨品展示



干湿料槽 Dry&wet feed trough



仔猪运输车 Piglet carrier



透明变径口 Transparent diameter changing mouth



南非绞龙 South Africa screw



提升绞龙 Lifting screw feed conveyor



骑马卡 Riding clip



料线支架 Feed line bracket



镀锌料线管 Galvanized feed line tube



PVC料管 PVC feed tube